

# Ahsay Cloud Backup Suite v7

## Quick Start Guide

Ahsay Systems Corporation Limited

3 November 2017

# Copyright Notice

© 2017 Ahsay Systems Corporation Limited. All rights reserved.

The use and copying of this product is subject to a license agreement. Any other use is prohibited. No part of this publication may be reproduced, transmitted, transcribed, stored in a retrieval system or translated into any language in any form by any means without prior written consent of Ahsay Systems Corporation Limited. Information in this manual is subject to change without notice and does not represent a commitment on the part of the vendor. Ahsay Systems Corporation Limited does not warrant that this document is error free. If you find any errors in this document, please report to Ahsay Systems Corporation Limited in writing.

This product includes software developed by the Apache Software Foundation (<http://www.apache.org/>).

## Trademarks

Ahsay, Ahsay Cloud Backup Suite, Ahsay Online Backup Suite, Ahsay Offsite Backup Server, Ahsay Online Backup Manager, Ahsay A-Click Backup, Ahsay Replication Server, Ahsay BackupBox Firmware, Ahsay Universal Backup System and Ahsay NAS Client Utility are trademarks of Ahsay Systems Corporation Limited.

Amazon S3 is registered trademark of Amazon Web Services, Inc. or its affiliates.

Apple and Mac OS X are registered trademarks of Apple Computer, Inc.

Dropbox is registered trademark of Dropbox Inc.

Google Cloud Storage and Google Drive are registered trademarks of Google Inc.

Lotus, Domino and Note are registered trademark of IBM Corporation.

Microsoft, Windows, Microsoft Exchange Server, Microsoft SQL Server, Microsoft Hyper-V, Microsoft Azure, One Drive and One Drive for Business are registered trademarks of Microsoft Corporation.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Oracle, Oracle 10g, Oracle 11g and MySQL are registered trademarks of Oracle Corporation.

Rackspace and OpenStack are registered trademarks of Rackspace US, Inc.

Red Hat, Red Hat Enterprise Linux, the Shadowman logo and JBoss are registered trademarks of Red Hat, Inc. [www.redhat.com](http://www.redhat.com) in the U.S. and other countries. Linux is a registered trademark of Linus Torvalds.

ShadowProtect is registered trademark of StorageCraft Technology Corporation.

VMware, ESX, ESXi and Vcenter are registered trademarks of VMware, Inc.

All other product names are registered trademarks of their respective owners.

## Disclaimer

Ahsay Systems Corporation Limited will not have or accept any liability, obligation or responsibility whatsoever for any loss, destruction or damage (including without limitation consequential loss, destruction or damage) however arising from or in respect of any use or misuse of reliance on this document. By reading and following the instructions in this document, you agree to accept unconditionally the terms of this Disclaimer and as they may be revised and/or amended from time to time by Ahsay Systems Corporation Limited without prior notice to you.

## Revision History

Date	Descriptions	Type of modification
30 Aug 2016	Updated Ch 4.1 Installation on Windows and Ch 4.2 Installation on Linux	Modified
29 Sep 2016	Updated Ch 1.1, 1.2.2, 3.2, 4.2, 5.1, 5.2, 5.4, 5.5, 5.6	Modified
7 Oct 2016	Added Ch 2. System Requirements; Revised Ch 3. Network and Firewall Settings; Updated Ch. 6 Download Backup Client	Modified
20 Oct 2016	Command line edited on Installation on Linux section	Modified
18 Nov 2016	Updated Ch 4.1 Installation on Windows, Ch 4.2 Installation on Linux and Ch 6 Downloading AhsayMOB on iOS Device; Added Ch 4.3 Installation on FreeBSD, Appendix Uninstall AhsayCBS on Windows, Linux and FreeBSD	Modified
27 January 2017	Minor format and style changes; Added details in Creating User Account section	Modified
10 Feb 2017	Added step in Appendix – Uninstall AhsayCBS on Windows	New
13 Jul 2017	Added info in Ch 1.2.2 Backup Client; Added info in Ch 2.1 Software Requirements; Added info and revised Ch 5.5 Creating User Account	New/Modified
26 Oct 2017	Added Restore Client for Ch1.2; Added URL on how to run agentless backup/ restore jobs using AhsayCBS user web console in Ch2.2; Added note for OpenDirect restore and Granular restore for Live Activities in Ch2.4; Added steps in Ch3.4; Added note for Host in Ch5.4; Added Download Restore Client and URL of user guide for AhsayOBR in Ch6; Added Pre-requisite requirements for Installation on FreeBSD for Ch4.3; Modified the AhsayOBM link of Linux GUI for Ch.6	New/ Modified

# Table of Contents

<b>1</b>	<b>Overview .....</b>	<b>1</b>
	System Overview .....	1
	Software Component Overview .....	2
	Backup Server .....	2
	Backup Client .....	3
	Restore Client .....	4
	Replication Server .....	6
	Redirector .....	6
<b>2</b>	<b>System Requirements .....</b>	<b>7</b>
	Software Requirements .....	7
	Hardware Requirements .....	7
	Best Performance for Running Agentless Backup and Restore .....	7
	AhsayCBS on Physical Machine .....	8
	Additional Disk Storage .....	8
	AhsayCBS on Virtual Environment .....	8
	AhsayCBS on Cloud Environment .....	8
	AhsayCBS on Standby Server .....	9
	Storage Requirements .....	9
	Redundant Disk Setup for Physical and Virtual Storage .....	9
	Physical Storage .....	10
	File System Tuning for Virtual Storage Environment .....	10
	Cloud Storage .....	11
	Requirements for Using AhsayCBS User Web Console .....	11
<b>3</b>	<b>Network and Firewall Settings .....</b>	<b>12</b>
	Overview .....	12
	Network Settings .....	12
	Static IP Address .....	12
	Network Load Balancing Configuration .....	12
	Firewall Settings .....	13
	Ports and Settings .....	13
	TCP Ports 80 and 443 .....	13
	Restricting Access on Administration Panel .....	13
	Replication Using Cross Over Cable .....	13
	Ahsay License Server .....	14
<b>4</b>	<b>Download and Install AhsayCBS .....</b>	<b>18</b>
	Installation on Windows .....	18
	Installation on Linux .....	24


Installation on FreeBSD .....	29
<b>5 Basic Setup and Configuration .....</b>	<b>35</b>
Activating License .....	35
Setting up User Home .....	37
Setting up SMTP .....	39
Setting up Hostname & System Home .....	42
Creating User Account .....	43
<b>6 Download Backup / Restore Client.....</b>	<b>49</b>
Download AhsayACB / AhsayOBM / AhsayOBR on Computer .....	49
Download AhsayMOB on a Mobile Device .....	51
Android Device .....	51
iOS Device .....	51
Instruction Regarding Installation of Client Backup Agent .....	51
<b>7 Contacting Ahsay .....</b>	<b>53</b>
Technical Assistance .....	53
Documentation .....	53
<b>Appendix.....</b>	<b>54</b>
Uninstall AhsayCBS on Windows .....	54
Uninstall AhsayCBS on Linux/FreeBSD .....	56

# 1 Overview

## System Overview

AhsayCBS consists of six core software components.



- AhsayOBM, AhsayACB and AhsayMOB are backup clients for installing on servers, desktops, laptop computers, or mobile devices that you need to back up.
- AhsayOBM, AhsayACB, AhsayOBR and AhsayMOB are restore clients for installing on servers, desktops, laptop computers, or mobile devices that you need to restore the backup data on.
- AhsayCBS is the server software which bundles a Backup Server, Replication Server and Redirector.
- Backup Server is the module that will host all the AhsayOBM/AhsayACB/AhsayMOB backup users and their backup data.
- Replication Server is the module to provide additional backup of the Backup Server.
- Redirector is the module to provide your backup environment with high scalability solution.

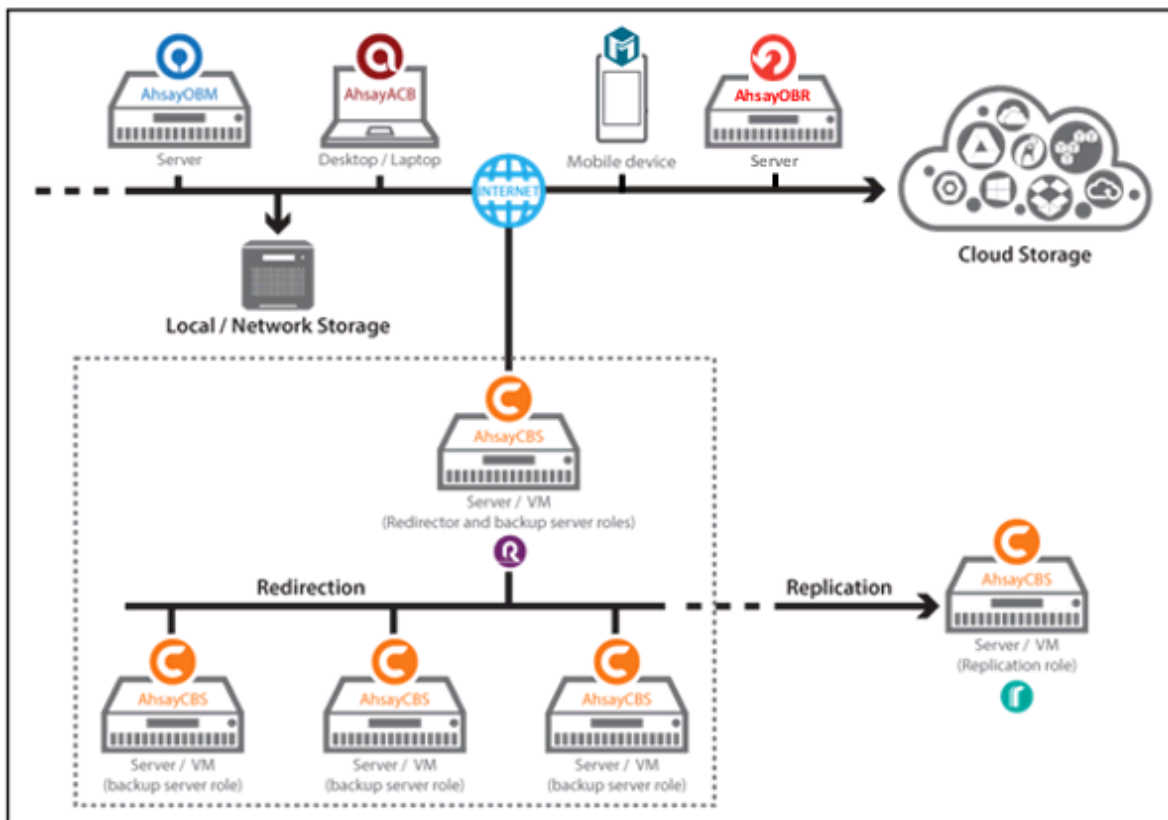

## Software Component Overview




### Backup Server

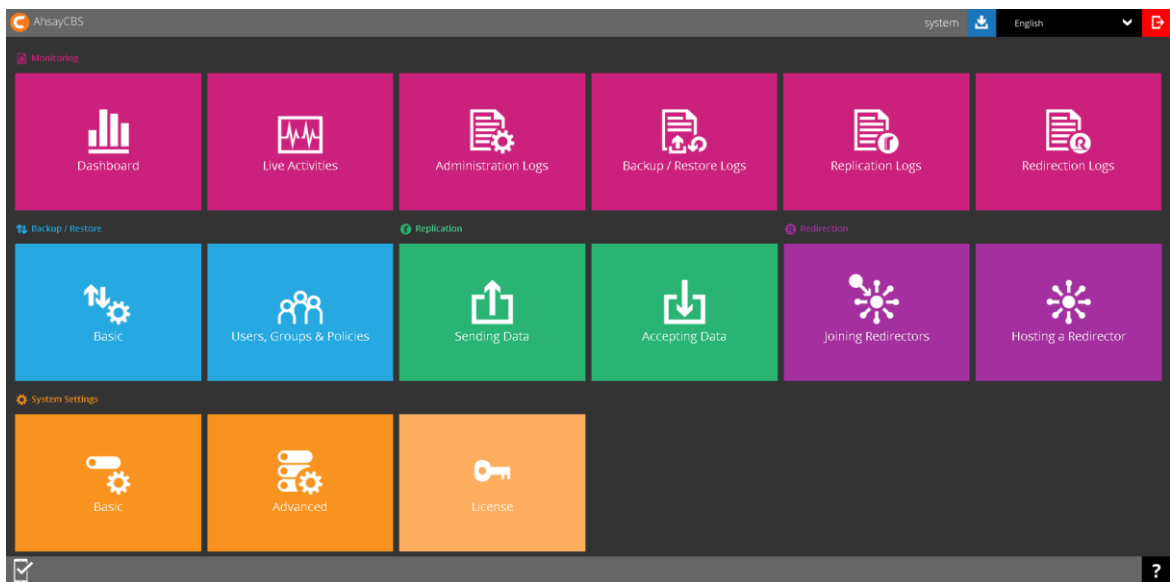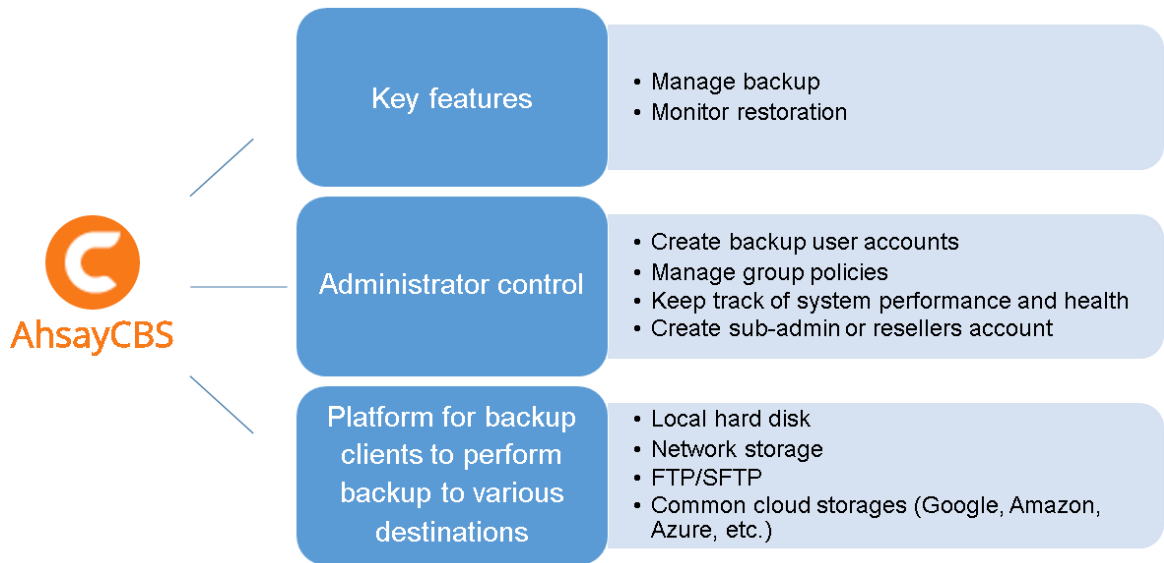AhsayCBS is a web-based centralized management console for managing backup and monitoring restoration.



## Backup Client

We have three backup clients catering customers with different needs. Below is a table providing a quick reference of the functionalities of the three backup clients.

			
<b>Backup source</b>	<p>Back up files, databases and virtual machines such as:</p> <ul style="list-style-type: none"> <li>➤ VMware</li> <li>➤ Hyper-V</li> <li>➤ Microsoft Exchange Database Availability Group (DAG)</li> <li>➤ Microsoft Exchange Database</li> <li>➤ Microsoft Exchange Mailbox</li> <li>➤ Microsoft SQL Server</li> <li>➤ Oracle Database</li> <li>➤ Lotus Domino/Note</li> <li>➤ MySQL</li> <li>➤ Windows System</li> <li>➤ Windows System State</li> <li>➤ ShadowProtect</li> <li>➤ Synology NAS Devices</li> <li>➤ Office365 Exchange Online</li> <li>➤ Cloud File</li> </ul>	<p>Back up files, Outlook / Outlook Express / Windows Live mail, Windows System, IBM Lotus Note and Cloud File.</p>	<p>Backup up photos, videos, contact, SMS messages*, WhatsApp messages*, voice files* on your Android or iOS device.</p> <p>*Only available for Android device</p>
<b>Backup destination</b>	<p>Local and offsite destinations, e.g. local storage, on-premises backup server or backup server located in datacenter, and common cloud storages (Google, Amazon, Azure, etc.)</p>		<p>Any backup destination defined by the CBS server, or one of the common cloud storages (Google Drive, Dropbox or OneDrive).</p>
<b>Data</b>	<p>All the backup data are compressed and encrypted</p>		<p>You can choose to</p>




<b>encryption</b>	before uploading to the Backup Server, while the restoration process requires downloading the compressed and encrypted data onto the client computer for decryption and decompression.	disable the encryption function so that files (e.g. photos or videos) uploaded to the cloud storage can be viewed directly from there.
-------------------	--	--

### Note

Run Direct restore and Granular restore requires no compression or encryption to optimize backup and restore performance.

## Restore Client

We have four restore clients (AhsayOBM/ AhsayACB/ AhsayOBR/ AhsayMOB) catering customers with different needs. Below is a table providing a quick reference of the functionalities of AhsayOBR.

	
<b>Restore source</b>	<p>Restore files, databases and virtual machines such as:</p> <ul style="list-style-type: none"> <li>➤ VMware</li> <li>➤ Hyper-V</li> <li>➤ Microsoft Exchange Database Availability Group (DAG)</li> <li>➤ Microsoft Exchange Database</li> <li>➤ Microsoft Exchange Mailbox</li> <li>➤ Microsoft SQL Server</li> <li>➤ Oracle Database</li> <li>➤ Lotus Domino/Note</li> <li>➤ MySQL</li> <li>➤ Windows System</li> <li>➤ Windows System State</li> <li>➤ ShadowProtect</li> <li>➤ Synology NAS Devices</li> <li>➤ Office365 Exchange Online</li> <li>➤ Cloud File</li> </ul>
<b>Restore destination</b>	The backup data will be restored to the mobile devices running restore client

While you can still download Client Backup Agent (AhsayOBM/ AhsayACB) to restore data on computer, AhsayOBR gives a quick, direct and secure solution just for the data restore purpose. Below is a table comparing some major features of both tools, and the pros and cons of using them.

Feature	Tool	Pros	Cons
Installation	AhsayOBR	<ul style="list-style-type: none"> <li>No installation required</li> <li>Faster to launch</li> </ul>	Required to launch every time when you use
	Client Backup Agent	One-time installation	Larger installer size hence longer installation time
Run Direct Restore	AhsayOBR	N/A	Run Direct restore for VMware and Hyper V servers is <b>NOT</b> supported. Since AhsayOBR is not a Client Backup Agent and therefore NFS is not bundled along with the software. NFS is a mandatory item for performing Run Direct restore for VMware and Hyper-V servers.
	Client Backup Agent	Support Run Direct restore for both VMware and Hyper-V servers.	N/A
OpenDirect Restore	AhsayOBR	OpenDirect restore allows you to view and download individual files from a compressed or image file, without having to restore compressed file or image file first. OpenDirect restore gives you the flexibility to restore selective file(s) quickly, so it saves you time and effort to achieve your restore goal.	To ensure optimal restore performance, the backup of the files in an OpenDirect file backup set will <b>NOT</b> be encrypted and compressed, therefore, you may have to take these factors in consideration when selecting this restore option.
	Client Backup Agent		
Granular Restore	AhsayOBR	In some cases, you may only need to restore a few individual file(s) from the guest VM, therefore, granular restore gives you a fast, convenient, and flexible tool to restore selected file(s) from a guest VM quickly.	To make ensure optimal restore performance, the backup of the guest VM will <b>NOT</b> be encrypted and compressed, therefore, you may have to take this factor in consideration when using this restore method.
	Client Backup Agent		
Cross platform usage	AhsayOBR	Although both tools are available for use on various platforms, e.g. Windows, Mac, Linux, etc., cross platform restore is <b>NOT</b> recommended. For example, files backed up on Windows are not recommended to restore on a Mac/Linux machine.	
	Client Backup Agent		

<b>Compatibility</b>	<b>AhsayOBR</b>	Support restore of backup set created on either AhsayACB / AhsayOBM	N/A
	<b>Client Backup Agent</b>	N/A	Support restore of backup set created by the same type of Client Backup Agent only. E.g. backup set created on AhsayOBM can only be restored by AhsayOBM.

## Replication Server

Replication Server offers close to real time replication of user data hosted on the Backup Server, so that when your live Backup Server is out of service, you can switch the Replication Server into Backup Server so as to keep your backup service uninterrupted. Alternatively, you can also choose to restore the backed up data from Replication Server when your Backup Server machine is recovered.

## Redirector

With the use of Redirector in conjunction with multiple Backup Server machines, it forms a cloud backup architecture for servicing as many backup customers as needed with a single public URL. All backup users will use the single URL as the initial contact server, even though they reside on different Backup Servers under different URLs. Thus, an online backup provider can add new Backup Server machines to serve new customers, or relocate existing backup accounts from one Backup Server to another easily without the need for the existing users to reconfigure the backup server address in AhsayOBM, AhsayACB or AhsayMOB.

### Important

For details regarding setup and configuration of the replication server and redirector, please refer to the **Administrator's Guide** via the URL below. Chapter 7 **Replication** and chapter 8 **Configuring Redirector** would state the details of replication and redirector respectively.  
[https://www.ahsay.com/download/download\\_document\\_cbs-admin.jsp](https://www.ahsay.com/download/download_document_cbs-admin.jsp)

## 2 System Requirements

Before you install the AhsayCBS, please pay attention to the following system requirements and make sure that the requirements are met before getting started.

The AhsayCBS should be deployed on a machine supporting 64-bit multiple CPU and multiple cores environment. A 64-bit operating system will allow AhsayCBS to run on a 64-bit Java JRE platform, as 64-bit Java is capable of supporting sufficient capacity for future business expansion, to meet the need of existing customers and to support new AhsayCBS server features.

When you deploy the AhsayCBS, please consider to assign a dedicated disk for the system home, user home and replication home. It is not suggested to install AhsayCBS on a disk which contains your operating system. Due to backup data growth this can quickly fill up the system drive which makes the operating system unstable, and may even crash the AhsayCBS server.

### Software Requirements

Refer to the following link for details of the operating systems, applications and databases supported by AhsayCBS.

[FAQ: Ahsay Software Compatibility List \(SCL\) for version 7.3 or above \(5001\)](#)

Refer to the following article for the list of compatible operating system for Granular Restore:

[FAQ: Ahsay Software Compatibility List \(SCL\) for Granular and OpenDirect Restore \(5250\)](#)

### Hardware Requirements

You can deploy AhsayCBS server on a physical machine, on a virtual machine, or on a cloud environment. The server requirements are outlined in the following sections.

Refer to the following link for details of the hardware requirements needed to run AhsayCBS successfully.

[FAQ: Ahsay Hardware Requirement List \(HRL\) for version 7.3 or above \(5000\)](#)

### Best Performance for Running Agentless Backup and Restore

For partners who wish to use our new agentless backup/restore feature using AhsayCBS User Web Console for Cloud File and Office365 Exchange mail backup, you may need to allocate additional RAM on your AhsayCBS to support this feature, as each running Cloud File or Office365 Exchange mail backup set requires approximately 170MB of additional memory. As a result the maximum number of scheduled concurrent agentless backup jobs is limited to two by default. To ensure agentless backup jobs do not consume all available Java memory which may affect the stability of the AhsayCBS service.

Please refer to the following KB article on how to set the maximum concurrent backup jobs on AhsayCBS: <https://forum.ahsay.com/viewtopic.php?f=204&t=16510>

Please refer to the following user guide for the details about how to run agentless backup/ restore jobs using AhsayCBS user web console:

[https://www.ahsay.com/download/download\\_document\\_cbs-user.jsp](https://www.ahsay.com/download/download_document_cbs-user.jsp)

## AhsayCBS on Physical Machine

When you deploy a physical machine, please consider to purchase a more powerful machine. This will reduce the need for frequent hardware upgrades when your backup business grows, which will require services down time for hardware upgrades and data migration.

It is a good idea to ensure your AhsayCBS server is equipped with some redundancy features, i.e. power supply, and is connected to a UPS (Uninterruptible Power Supply).

## Additional Disk Storage

Connect a Direct-Attached Storage (DAS) with e.g. a 12 hard disk bays filled with 4TB hard disks via the SCSI interface, extra SCSI controller card required.

With the above setup, it should be able to handle 100 users with around 30TB of storage and a total of 1000 backup sets. With this server setup, it is not yet reaching the server's physical limitation. There are still other factors that may limit the growth of users, e.g.: network bandwidth. Also, it is easier to manage from administration point of view.

There are 2 assumptions:

- Each user has round 300GB of backup data, with constant 3% of changes daily.
- Each user account has configured 10 backup sets. These backup sets could be run on different machines and backup to the AhsayCBS at the same time.

AhsayOBM/AhsayACB backup clients are enhanced to utilize multiple threads for backup and restore. It is recommended to keep the maximum number of concurrent backup jobs on the AhsayCBS to 1000, to avoid potential performance problems.

### ***Additional Storage on Cloud***

Besides local storage, you can set up network storage, FTP/SFTP and common cloud storages (Google Drive, Dropbox, OneDrive, Amazon Drive, Box, etc.) for the AhsayCBS.

## AhsayCBS on Virtual Environment

It is more flexible when you deploy AhsayCBS on virtual machine environment, as you can increase memory size, process cores according to the actual need.

If VM snapshots are not required, please try to delete or reduce the amount of snapshots stored on your disk. Please also check on the storage requirement on virtual environment.

### ***Additional Storage on Cloud***

Besides local storage on your virtual machine, you can set up network storage, FTP/SFTP and common cloud storages (Google Drive, Dropbox, OneDrive, Amazon Drive, Box, etc.) for the AhsayCBS.

## AhsayCBS on Cloud Environment

To host an AhsayCBS on cloud, the basic requirement would be similar with setting up a physical machine. It is more flexible when you need to increase memory size, process cores, and disk space. In addition, you will need to take the running cost of a server instance and network usage, which are considered as a hidden cost for the setup.

You can consider hosting a cloud server instance such as Amazon or Azure.

## AhsayCBS on Standby Server

To ensure you have a backup of your Backup Server in the event of any hardware issues. We recommend replicating your data on the Backup Server to the Replication Server.

In case you need to shut down your Backup Server for maintenance, you can simply switch your Replication Server to the Backup Server, and change the DNS record from your current Backup Server to the Replication Server.

The hardware requirement of the Replication Server would be similar as your Backup Server and usually configured with more storage than your Backup Server.

Although both Backup Server and Replication Server are bundled in AhsayCBS, both backup and replication services are activated post installation.

It is not recommended to configure and use both services on one machine, as they will compete for system resources, i.e. CPU, memory and storage. This could affect the performance and stability of your backup service. Also, it will completely defeat the purpose of Replication Server as a backup or standby server to your Backup Server.

Please also check the details on the replication setup.

## Storage Requirements

When you are setting up storage for your AhsayCBS, please consider the following:

- Type of RAID to fit your requirement (for local physical server or virtual environment)
- If you are deploying the storage locally, you are required to set up storage with redundancy, such as RAID 5 or RAID 6. This is important especially when you are delivering a backup service with good disk performance as well as good fault tolerance.
- Dedicate storage location for the system, user home and replication home
- Physical storage, virtual storage, and cloud storage

## Redundant Disk Setup for Physical and Virtual Storage

We would recommend setting a rack mount server with several hard disk bays and/or attach a DAS for future expansion.

When you are setting up a rack mount server with 10 4TB hard disks, you may have concerns whether formatting the disk volume with RAID 5 or RAID 6. The following table lists out the differences between the 2 disk array setup.

	RAID 5	RAID 6
Total capacity	Around 36TB	Around 32TB
Fault tolerance	1-drive failure	2-drive failure
Speed gain	9x read speed	8x read speed

As the cost of hard disk has reduced a lot nowadays, it is strongly recommended that you format your disk volume with RAID 6 that maximizes the protection.

## Dedicated Storage on AhsayCBS

When you partition the disk in your new server, please consider to set up dedicated virtual disk volumes for operating system, application system, user homes and replication home (if Replication Server is enabled), respectively. It is a common practice that application system home, user homes and replication homes are not located in the system volume, which may fill up easily, causing the system unstable.

### Space required for application system home with replication setup

If you have replication setup on the Backup Server, please consider to dedicate a volume for the application home with sufficient disk space to store the transaction log. As there is no exact formula for estimating the size of the application home, the amount of space used for the transaction log is dependent upon:

- The period of time that the replication reached the replay mode
- The amount of daily backup data uploaded to your backup server

For example, if daily customer backup jobs generate an average of 20GB of data. Your previous replication takes about 5 days to the replay mode, and then your application home partition will require at least 100GB (20GB x 5 days) of free disk space.

This is only a general rule of thumb, this estimation does not take into consideration the growth of daily backup data, or the accumulation of backup data on the backup server which will result in a longer time to reach replay mode.

Setup multiple dedicated disks for each replication receiver.

If your Replication Server has setup several replication by multiple Backup Server, it is recommended that each receiver is located on its own individual disk. The advantages of this type of setup is that it minimizes the I/O on each disk, therefore improving replication performance.

Also, if one of the Backup Servers suffers an outage, there is the option of swapping the disk to the affected Backup Server.

## Physical Storage

If you plan to have physical backup server, you are expected to have a fast local backup storage such as local hard disks, DAS or SAN. It is a solution for your business which wants to host the backup data with your physical backup server in your server room or data center.

Please avoid using network storage such as NAS, share drive on another computer as the backup and restore performance is lower.

## File System Tuning for Virtual Storage Environment

If your backup server and user's data are hosted on a virtual environment, you need to check on the following to make sure the performance has been optimized.

When you set up a disk to attach on a virtual machine, please consider choosing the "thick provisioning" option or the "allocate all disk space" option. This is because choosing "thin provisioning" or "non-allocate all disk space" option may slow down disk performance when the amount of data grows.

Please also consider running the user home on a dedicated virtual disk, which is configured on fast and non-busy physical disks.



## Cloud Storage

If you are considering hosting your backup server instance with a commercial cloud services provider such as Google, Amazon, Azure etc., you need to set up cloud storage for your user home, predefined destination or replication home as well.

## Requirements for Using AhsayCBS User Web Console

In order to use the AhsayCBS user web console, you need the following:

- **Internet connection**

You need to have Internet connection to access the AhsayCBS user web console.

- **Web browsers**

The AhsayCBS user web console runs with all major browsers such as Google Chrome, Microsoft Internet Explorer, Mozilla Firefox, and Apple Safari. Please make sure that you are using the latest version of the browser.

### Note

You can also monitor live backup and restore activities on the AhsayCBS user web console of your mobile device.

**OpenDirect restore** of file backup sets or **Granular Restore** for VMware and Hyper-V backup sets performed using Windows File Explorer will not show up on the **Restore Status** tab in **Live Activities**. **Restore Status** tab in **Live Activities** only applies to the restore performed directly through AhsayOBM/ AhsayACB/ AhsayOBR/ AhsayMOB or AhsayCBS user web console.



## 3 Network and Firewall Settings

### Overview

In this section, we shall discuss the network and firewall settings required for the AhsayCBS. These include the access to the web interface, license activation, backup and restore processes, email port settings and replication port settings.

As a prerequisite, a fixed remote IP and internal IP are required for the AhsayCBS. Also, the firewall should support the TLSv1 cryptographic protocol.

### Network Settings

#### Static IP Address

The use of dynamic IP addresses for AhsayCBS domain names may result in an unstable backup service, or replication process restarting whenever the IP address re-cycles.

A static IP address will ensure the remote IP address sent by AhsayCBS to the Ahsay license server will remain the same during daily routine license checks. This will avoid potential license errors, i.e. 1011 or 1012 license errors which could result in the automatic shutdown of your AhsayCBS service.

It is strongly recommended that you use a static IP address for your AhsayCBS server to ensure a stable and reliable backup service.

#### Network Load Balancing Configuration

For AhsayCBS servers which are configured with network load balancing, i.e. a dual WAN router or Round Robin routing. A static route should be configured for your AhsayCBS server connection to the Ahsay License Server (**lic.ahsay.com**). This will ensure the remote IP address sent by AhsayCBS to the Ahsay License Server will remain the same during daily routine license checks. This will avoid potential license errors, i.e. 1011 or 1012 license errors which could result of the automatic shutdown of your AhsayCBS service.

In addition, any switching between the two network connections will cause connection problems between Backup Server and Replication Server due to the change in IP address. This will result in the replication process restarting itself.

## Firewall Settings

### Ports and Settings

After you have finished setting up your AhsayCBS server, please ensure you have updated your firewall settings to allow network traffic through the following ports:

Port	Description
80	HTTP port for incoming backup and restore traffic, browsing the AhsayCBS web interface.
443	HTTPS port for incoming backup and restore traffic, browsing the AhsayCBS web interface.
25	Outgoing SMTP port to the SMTP server.
111	Port Mapper
1058	Mount Port ** Required for Run Direct on AhsayCBS
2049	Port for NFS Service
Any incoming TCP port(s)	Any incoming TCP port(s) used by previous version of replication receiver(s), e.g. 9444, 9445...

### TCP Ports 80 and 443

It is recommended to expose only TCP ports 80 and 443 to the public on your firewall. Please consult the user's manual of your firewall for more information on how to do so.

### Restricting Access on Administration Panel

For security reasons, we would recommend that the Administration Panel of AhsayCBS must be hidden from public access, i.e. it should be exposed to local area network only, or you may restrict a range of IP addresses to access your AhsayCBS console.

### Replication Using Cross Over Cable

It is not recommended to set up a Backup Server and a Replication Server using a cross over cable for replication, which will result in connection and performance issues.

If the Backup Server and the Replication Server are located on the same site they should be connected via a switch.


## Ahsay License Server

The AhsayCBS server is required to access the Internet to connect to our license server **lic.ahsay.com** using the https protocol in order to activate the trial license key or validate a purchase key.

Please ensure the firewall outbound connection settings are enabled and the TLSv1 setting is allowed.

### Windows

To verify connection to the Ahsay license server, please open a browser on the Window machine and load <https://lic.ahsay.com> in a browser. If the connection is successful, you will see the following screen.

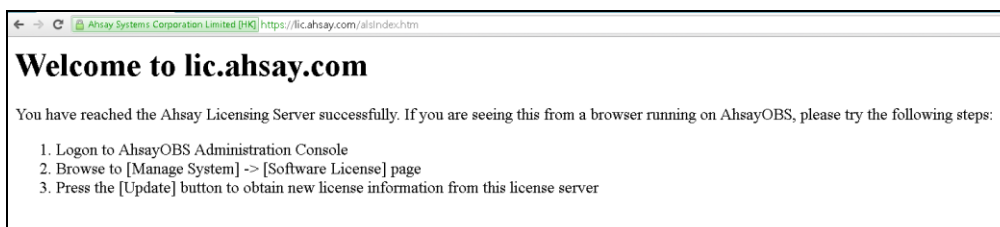

### Linux / Unix

To verify connection to the Ahsay license server, use the **telnet** command. If the connection is successful, you will see the following message.

```
# telnet lic.ahsay.com 443
Trying 203.186.85.237...
Connected to lic.ahsay.com.
Escape character is '^]'.
```

To verify TLSv1 is enabled, use **openssl s\_client** command. If TLSv1 is enabled, you will see the following message.

```
# openssl s_client -connect lic.ahsay.com:443 -tls1
CONNECTED(00000003)
depth=3 C = US, O = "The Go Daddy Group, Inc.", OU = Go
Daddy Class 2 Certification Authority
verify return:1
depth=2 C = US, ST = Arizona, L = Scottsdale, O =
"GoDaddy.com, Inc.", CN = Go Daddy Root Certificate
Authority - G2
verify return:1
depth=1 C = US, ST = Arizona, L = Scottsdale, O =
"GoDaddy.com, Inc.", OU =
http://certs.godaddy.com/repository/, CN = Go Daddy Secure
Certificate Authority - G2
verify return:1
depth=0 1.3.6.1.4.1.311.60.2.1.3 = HK, businessCategory =
Private Organization, serialNumber = 0498825, C = HK, ST =
Hong Kong, L = Kowloon, O = Ahsay Systems Corporation
Limited, CN = ahsay.com
verify return:1
---
Certificate chain
 0 s:/1.3.6.1.4.1.311.60.2.1.3=HK/businessCategory=Private
Organization/serialNumber=0498825/C=HK/ST=Hong
```

```

Kong/L=Kowloon/O=Ahsay Systems Corporation
Limited/CN=ahsay.com
    i:/C=US/ST=Arizona/L=Scottsdale/O=GoDaddy.com,
Inc./OU=http://certs.godaddy.com/repository//CN=Go Daddy
Secure Certificate Authority - G2
    1 s:/C=US/ST=Arizona/L=Scottsdale/O=GoDaddy.com,
Inc./OU=http://certs.godaddy.com/repository//CN=Go Daddy
Secure Certificate Authority - G2
    i:/C=US/ST=Arizona/L=Scottsdale/O=GoDaddy.com, Inc./CN=Go
Daddy Root Certificate Authority - G2
    2 s:/C=US/ST=Arizona/L=Scottsdale/O=GoDaddy.com, Inc./CN=Go
Daddy Root Certificate Authority - G2
    i:/C=US/O=The Go Daddy Group, Inc./OU=Go Daddy Class 2
Certification Authority
    3 s:/C=US/O=The Go Daddy Group, Inc./OU=Go Daddy Class 2
Certification Authority
    i:/C=US/O=The Go Daddy Group, Inc./OU=Go Daddy Class 2
Certification Authority
---
Server certificate
-----BEGIN CERTIFICATE-----
MIIATCCBumgAwIBAgIJAPwOHYVgUxkXMA0GCSqGSIb3DQEBCwUAMIG0MQsw
CQYD
VQQGEwJVUzEQMA4GA1UECBMHQXJpem9uYTETMBEGA1UEBxMKU2NvdHRzZGFs
ZTEa
MBGGA1UEChMRR29EYWRkeS5jb20sIEluYy4xLTArBgNVBAstJGh0dHA6Ly9j
ZXJ0
cy5nb2RhZGR5LmNvbS9yZXBvc2l0b3J5LzEzMDEGA1UEAxMQR28gRGFkZHZk
U2Vj
dXJlIENlcnRpZmljYXRlIEF1dGhvcml0eSA0IEcyMB4XDTE2MDQyMjAzMDAz
OFoX
DTE4MDQxNTAzMjMzOFowgbkxEzARBgsrBgEEAYI3PAIBAxMCSEsxHTAbBgNV
BA8T
FFByaXZhdGUgT3JnYW5pemF0aW9uMRAwDgYDVQQFEwcwNDk4ODI1MQswCQYD
VQQG
EwJISzESMBAGA1UECBMJSjG9uZyBLb25nMRAwDgYDVQQHEwdLb3dsb29uMSow
KAYD
VQQKEyFBaHNheSBTeXN0ZW1zIENvcnBvcml0eSAw9uIEVpbnVlOZWQxZW5j
BAMT
CWFoc2F5LmNvbTCCASIdQYJKoZIhvcNAQEBBQADggEPADCCAQoCggEBAM1c
vjg+
GpaWn18IjmBCKIpDRWzL7tocrB7+reON619nQTq7W6AlsD/UWTldoOMeQyEW
Y+3b
kdsI4QGNB2hNwzd36+k5yxST8IPuyGE7eLHe6L7RyQxNT3BLos48i9p0l0cX
KEWo
08wDFw0y2bMiTbkTTErrGk1VqR8oYKV5Pg9RYDoNg2j6I7mCz1v05KJWxTL4
9PAQ
TmKmK3EX1esvkss9Pz3mfhm/fpJFQfhT+KSTA8b/75RbW2pCQyKW7a9NVX4I
yx6o
dIDDAU568bAV6y74b9hh4ty6+0zSW+x3+CQLPXEd8NJJCtXAitb78qJENkDS
xGMH
sW4vuEDKX6UF3f8CAwEAaOCBA0wggQJMAwGA1UdEwEB/wQCMAAwHQYDVR01
BBYw
FAYIKwYBBQUHAWEGCCSGAQUFBwMCMA4GA1UdDwEB/wQEAwIFoDA1BgNVHR8E
LjAs
MCqgKKAmhiRodHRwOi8vY3JsLmdvZGFkZHZkuY29tL2dkaWcyZyMtNC5jcmww
XAYD
VR0gBFUwUzBIBgtghkgBhv1tAQcXAzA5MDcGCCSGAQUFBwIBFitodHRwOi8v
Y2Vy
dGlmaWNhdGVzLmdvZGFkZHZkuY29tL3JlcG9zaXRvcnkvaMacGBWeBDAEBMHY
CCSG

```

```

AQUFBwEBBGowaDAkBggrBgEFBQcwAYYYaHR0cDovL29jc3AuZ29kYWRkeS5jb20v
MEAGCCsGAQUFBzAChjRodHRwOi8vY2VydG1maWNhdGVzLmdvZGFkZHkuY29tL3Jl
cG9zaXRvcnkzZ2RpZzIuY3J0MB8GA1UdIwQYMBaAFEDCvSeOzDSDMKIz1/ts
s/C0
LIDOMIH5BgNVHREEgfEwge6CCWFoc2F5LmNvbYINd3d3LmFoc2F5LmNvbYIO
c2hv
cC5haHNheS5jb22CEHd3dy51ay5haHNheS5jb22CFXBhcnRuZXJzLmFoc2F5
LmNv
bS5jb0INbG1wLmFoc2F5LmNvbYIVcGFydG51cnMtdXMWYWhzYXkuY29tgglw
Y3Au
YWhzYXkuY29tghVwYXJ0bmVycy1lay5haHNheS5jb22CDWlkcC5haHNheS5j
b22C
DGtiLmFoc2F5LmNvbYIQd3d3LmFoc2F5LmNvbS5jb0IPZm9ydW0uYWhzYXku
Y29t
gglsaWMWYWhzYXkuY29tMB0GA1UdDgQWBBQU/GniKbSMjgEmaqndKdtzS0Dq
lDCC
AX8GCisGAQQB1nkCBAIEggFvBIIBawFpAHcAVhQGmi/XwuzT9eG9RLI+x0Z2
ubyZ
EVzA75SYVdaJ0N0AAAFUO+sXggaABAMASDBGAiEA3hPo2F1QZZX75QIRGfLM
bspW
n8MlmeM8k1TCYmHDie8CIQC0Eg8Z9duyg6RvYBT7ahtQ8eojA/7GsOpBoZKX
DoK1
NABlAgj2mPgZIK+OozuuSgdTPxxUV1nk9RE0QpnrLtPT/vEAAABVDvrGT0A
AAQD
AEYwRAIgbj3ZWvwZL75Zx1Vd1sC4ZSzhAN1TfaIlecBS9Ie4K3ICICKTx2OT
GWHO
spDVowj59LSWHDG5Z9c1B/bs9sRl5nUcAHcApLkJkLQYWBSHuxOizGdwCjw1
mAT5
G9+443fNDsgN3BAAAAFUO+scaAAABAMASDBGAiEA5MdV9o+iN4ecJnjCgA0q
xhno
Mm5+9s5JUX+oKknk5pkCIQDwDkuAEcjEM4vouxZzAtqcozWikMJoTFn++vIF
brEZ
SzANBkgqhkiG9w0BAQsFAAOCAQEAcKpSovHqtpyAx5bKyXQRRh8Fyo/WTa0e
BMcl
5KpgII49V6/wwle6rmbMa3xVKqNENjH4GaqGY2AZAx9iVr+NN+VFNroPUGqz
pJ0B
ih9tLl/VCV/lvy67Chs7NHv3D1AEsrKJYUqpl0sQy/QhSIRAAa3bY8i7+MOF
EYJt
ADa+254k6G19s99PvmBniepxuUy8x/9h7h7K4m+OIgXQaLXE6lr4LG50p/GO
Kx/I
1feC6RUCx8gW9qBoTTl7M6o8Jb/SXUN6/mAVsronEG+yyqNXCCuQwNpaKJK5
hMkz
0EbBqltS/VyTtW9z0g4vAlPQrgaqCLG/ZJivBESf8wvsgfZNpA==
-----END CERTIFICATE-----
subject=/1.3.6.1.4.1.311.60.2.1.3=HK/businessCategory=Private
Organization/serialNumber=0498825/C=HK/ST=Hong
Kong/L=Kowloon/O=Ahsay Systems Corporation
Limited/CN=ahsay.com
issuer=/C=US/ST=Arizona/L=Scottsdale/O=GoDaddy.com,
Inc./OU=http://certs.godaddy.com/repository//CN=Go Daddy
Secure Certificate Authority - G2
---
No client certificate CA names sent
Server Temp Key: ECDH, prime256v1, 256 bits
---
SSL handshake has read 6160 bytes and written 289 bytes
---
New, TLSv1/SSLv3, Cipher is ECDHE-RSA-AES256-SHA
Server public key is 2048 bit

```

```

Secure Renegotiation IS supported
Compression: NONE
Expansion: NONE
SSL-Session:
  Protocol   : TLSv1
  Cipher     : ECDHE-RSA-AES256-SHA
  Session-ID:
6914212983C0321AB9520FFC6E7515845D8836D7B185EF1D2363D3C7EAA8
5D48
  Session-ID-ctx:
  Master-Key:
79BECEF9E2C3088F4928229047A21BE9E9239C32D2F79B4DB4FC7CF66098
423D0EF0D64741E3075AEA62E9222D6DD4B2
  Key-Arg    : None
  Krb5 Principal: None
  PSK identity: None
  PSK identity hint: None
  TLS session ticket lifetime hint: 300 (seconds)
  TLS session ticket:
0000 - 8c 55 8e c3 19 9a 34 14-63 67 66 aa 49 7b c9
41  .U....4.cgf.I{.A
0010 - 3f 03 db c1 ec f9 db e1-b6 eb 4f 51 0c 3a 83
9b  ?.....OQ.:...
0020 - 73 20 93 c1 41 6e 5a ac-f5 65 92 4f b8 92 fb ef
s ..AnZ...e.O....
0030 - 2b 3d f7 f3 03 c8 3a b5-1b 52 9a 5a 43 ba 0a 7d
+=.....R.ZC..}
0040 - 47 e8 6a 22 72 85 9d d2-f1 dd 9d 6d b5 65 8a 0a
G.j"r.....m.e..
0050 - 30 26 1b d9 55 8c 25 65-71 0b a5 1f 57 38 2b 71
0&...U.%eq...W8+q
0060 - 81 f1 c0 4e bd 51 d3 43-b5 41 40 8f 71 3c 72
8d  ...N.Q.C.A@.q<r.
0070 - 5a c8 70 72 38 47 a0 b0-4a cd 8b e3 10 48 0c 2e
Z.pr8G..J....H..
0080 - 44 a9 48 9e df 56 7a 9f-e5 00 f4 37 f2 59 ee 2f
D.H..Vz....7.Y./
0090 - eb 3a 33 7b 1e 26 09 d9-cd a4 d8 2e 30 51 80
1a  .:3{.&.....OQ..
00a0 - 72 78 ae 0a a8 48 bd 0a-ca 16 23 8a e9 44 db ce
rx...H....#...D...


  Start Time: 1503557290
  Timeout    : 7200 (sec)
  Verify return code: 0 (ok)
---
closed

```


## 4 Download and Install AhsayCBS

### Installation on Windows


1. Log in as root on your Windows machine.
2. In a browser, download the AhsayCBS installation package **cbs-win.exe** from the [Ahsay website](#).
3. Run the downloaded installer.
4. Choose the language, and then click **OK** to continue.

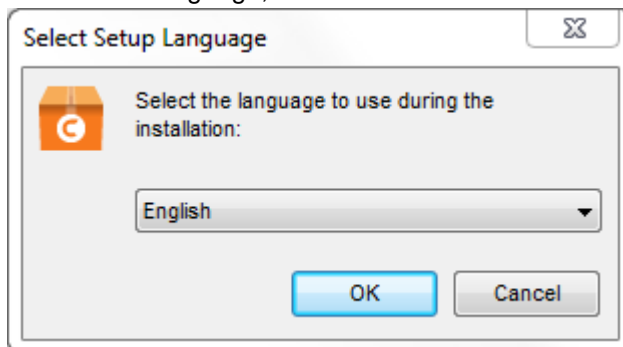


5. Click **Next** to continue.

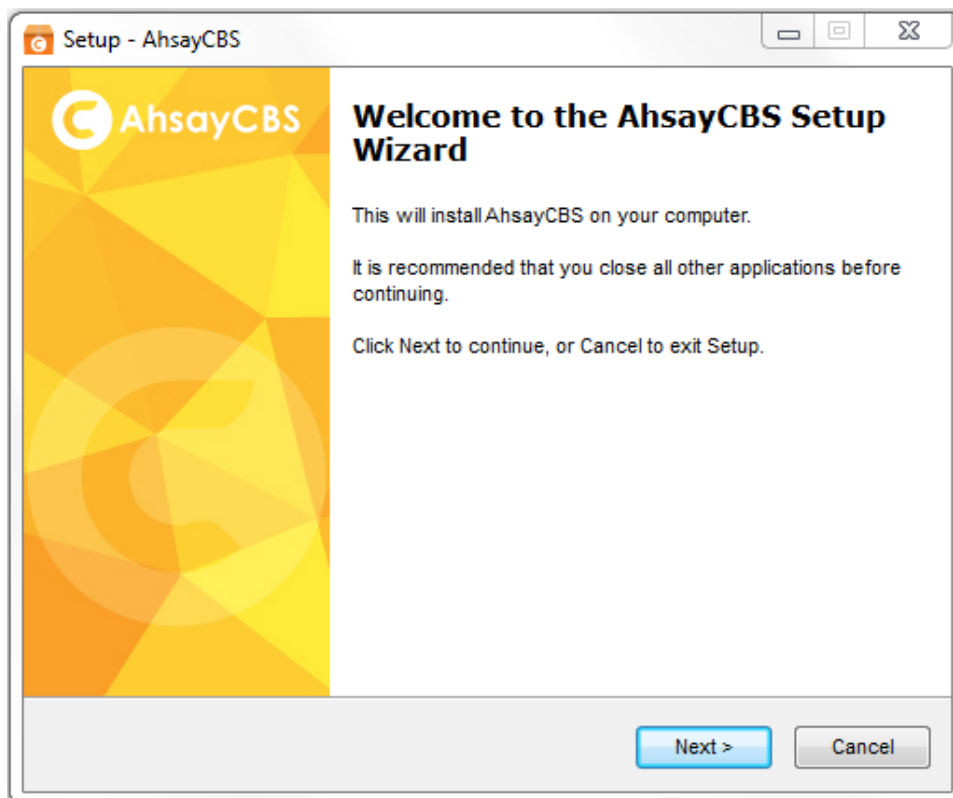

6. Select **I accept the agreement** after reading the license agreement. Then, click **Next** to continue.

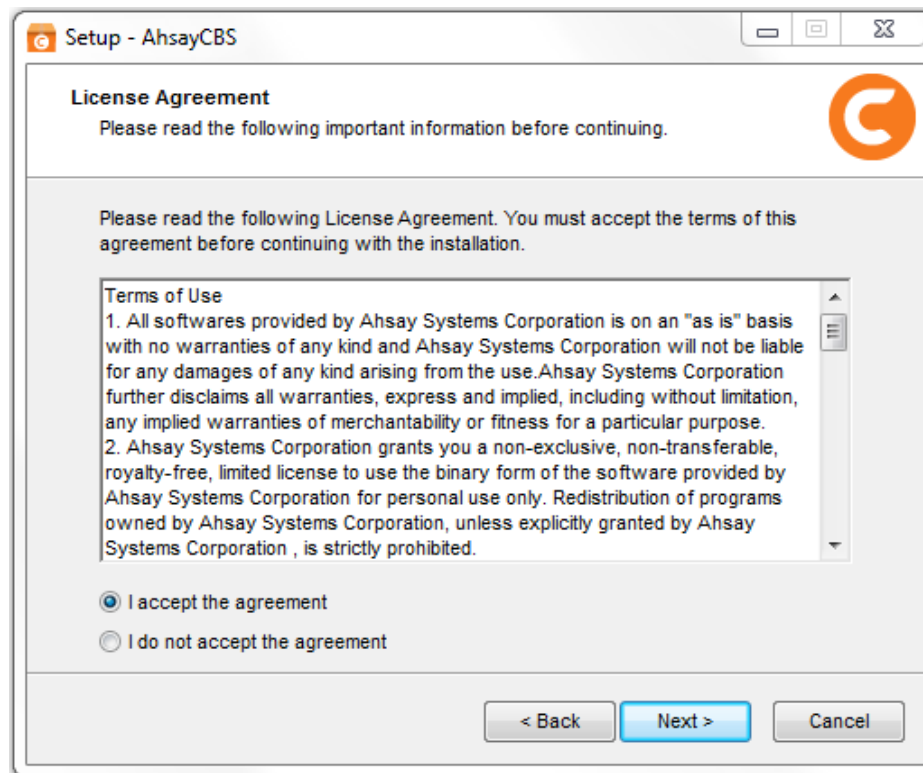


7. Choose the installation directory. Then, click **Next** to continue.

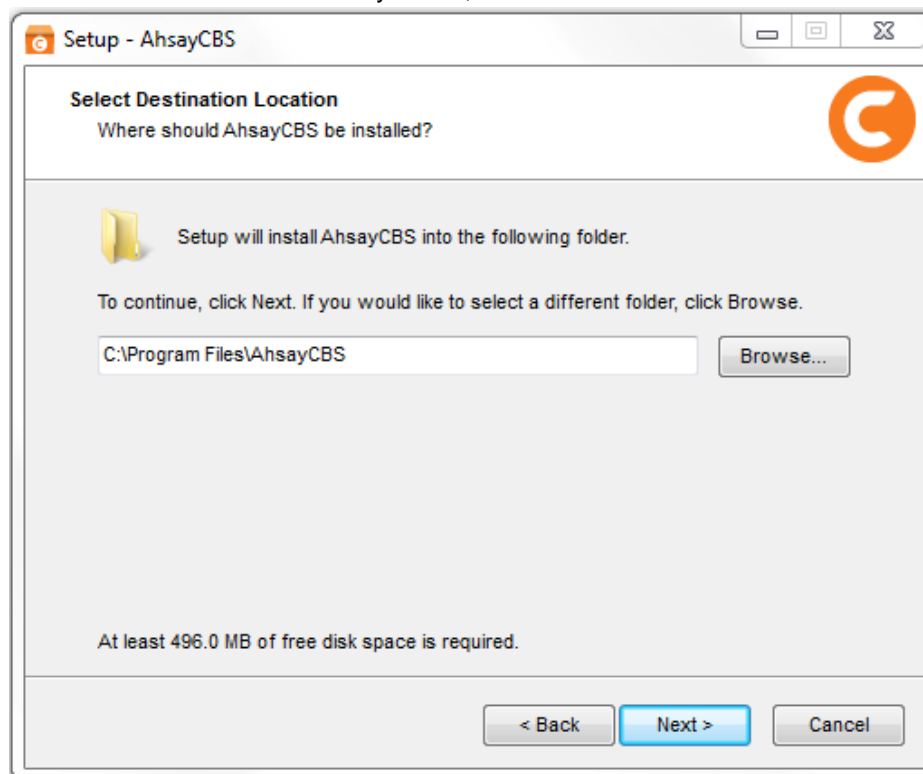





8. Click **Next** to continue.

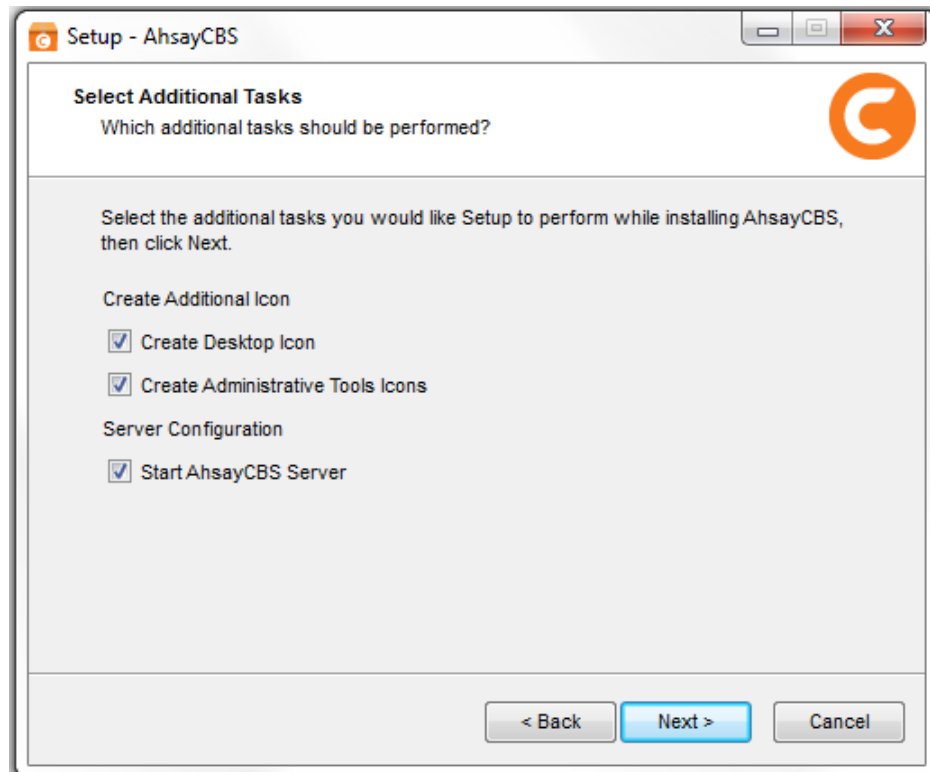


9. Enter the ports to be used by AhsayCBS. By default, the ports are 80 and 443 (HTTP and HTTPS respectively). If these ports have been used by other applications, e.g. Microsoft IIS, Apache or other applications, please use alternative ports such as 8080 and 8443. Click **Next** to continue when you are done setting.

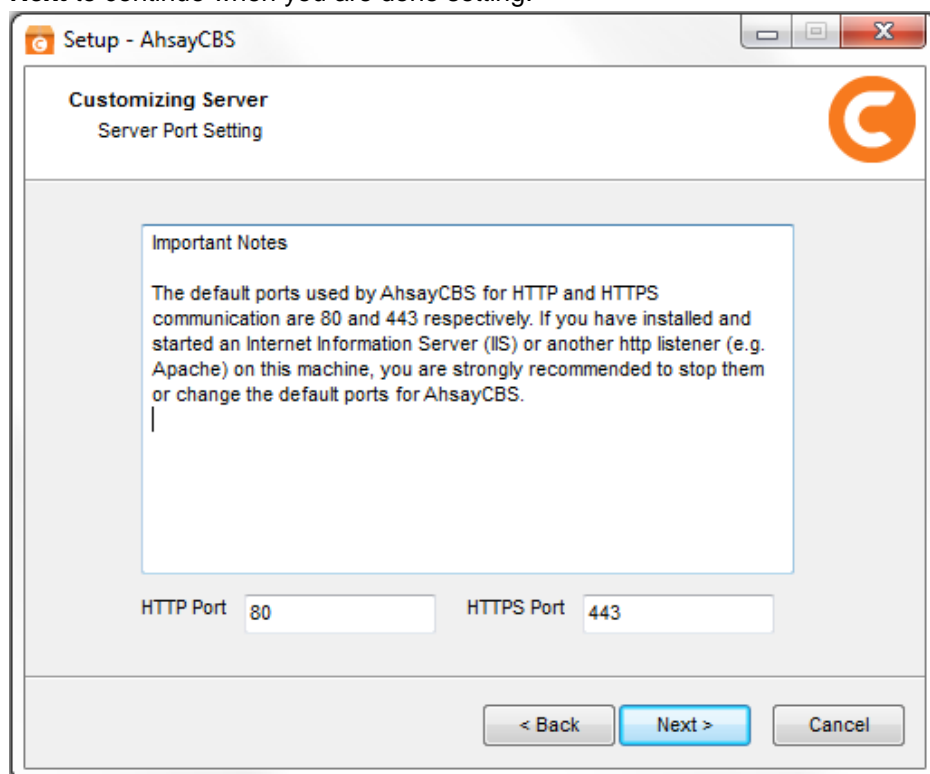


10. Click **Install** to start the installation.

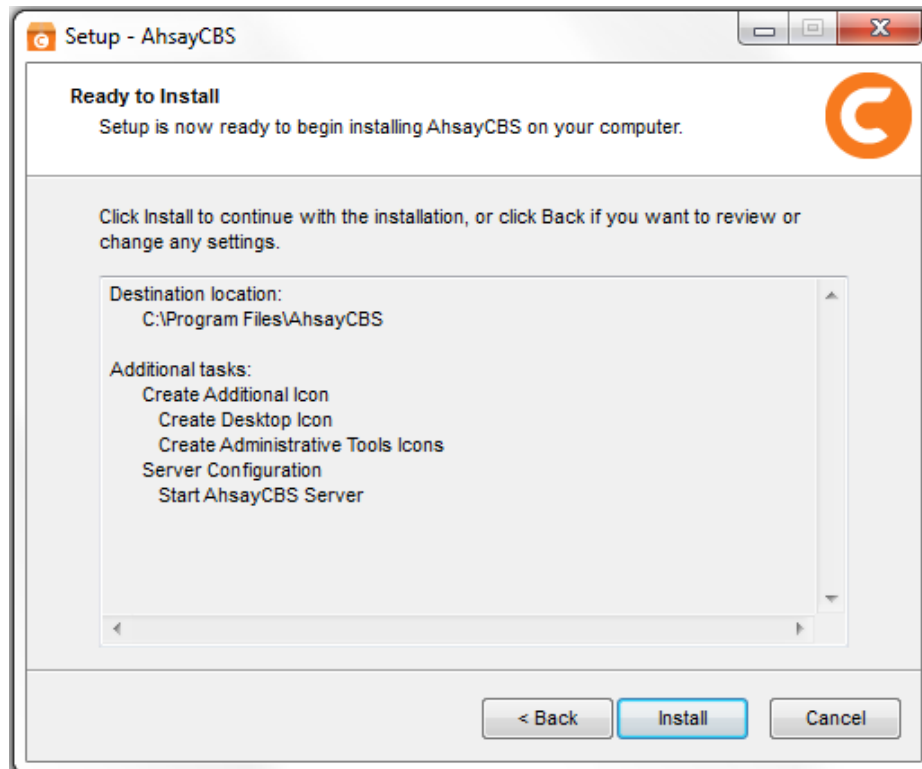


11. Click **Finish** to complete the installation.

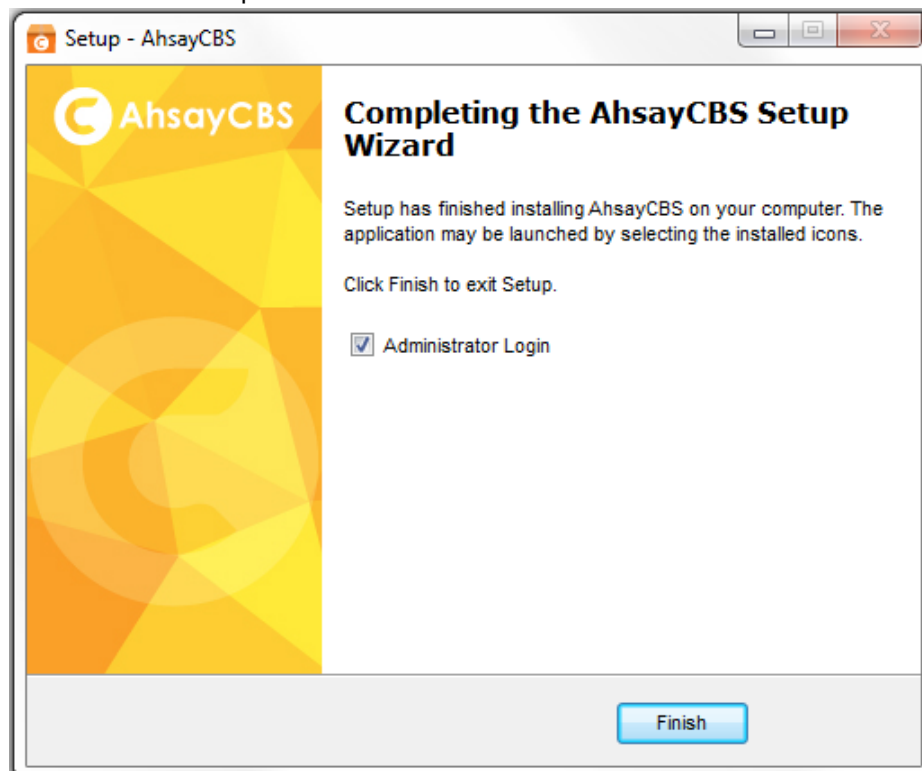

12. Run `services.msc` to open **Services** from Windows to confirm that the AhsayCBS service has started. In the following screen shot, the status of **Ahsay Cloud Backup Suite** is “**Started**” and the status of the **NFS Service (Ahsay Systems Corporation)** is “**Started**”.

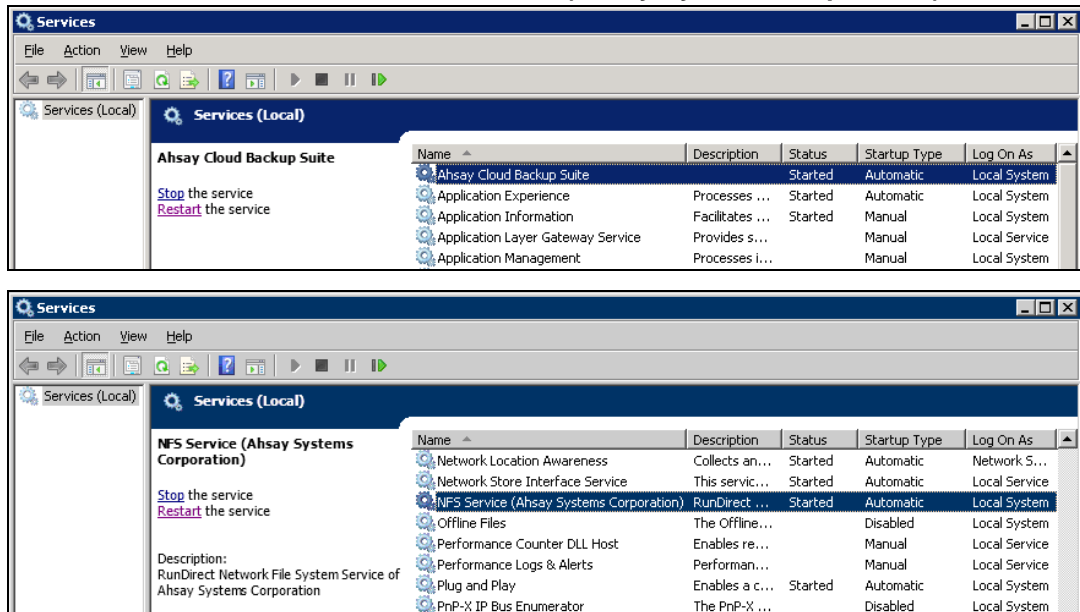

- When you need to reset the service of an item, select the item (e.g. **Ahsay Cloud Backup Suite**) and then press **Restart** in the left pane. Alternatively, after selecting the item, press **Stop** and then press **Start**.

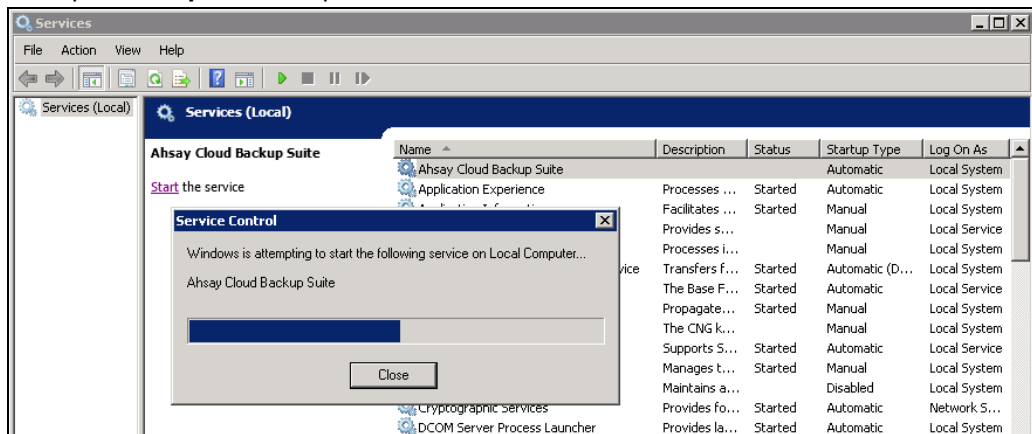

13. Open Command Prompt and type the following command to check whether CBS is listening to pre-defined **http** and **https** ports. The default port values are 80 and 443 respectively.

```
netstat -an|more
```


14. You get a list of all active connections. You can see clearly that AhsayCBS is listening to both ports 80 and 443.

```
C:\Users\Administrator>netstat -an|more
Active Connections

Proto Local Address Foreign Address State
TCP 0.0.0.0:80 0.0.0.0.0 LISTENING
```

TCP	0.0.0.0:135	0.0.0.0.0	LISTENING
TCP	0.0.0.0:443	0.0.0.0.0	LISTENING
TCP	0.0.0.0:445	0.0.0.0.0	LISTENING
TCP	0.0.0.0:3389	0.0.0.0.0	LISTENING

15. After successful installation, you can access the login page by opening **localhost** (<https://127.0.0.1/cbs/Logon.do>) in a browser.

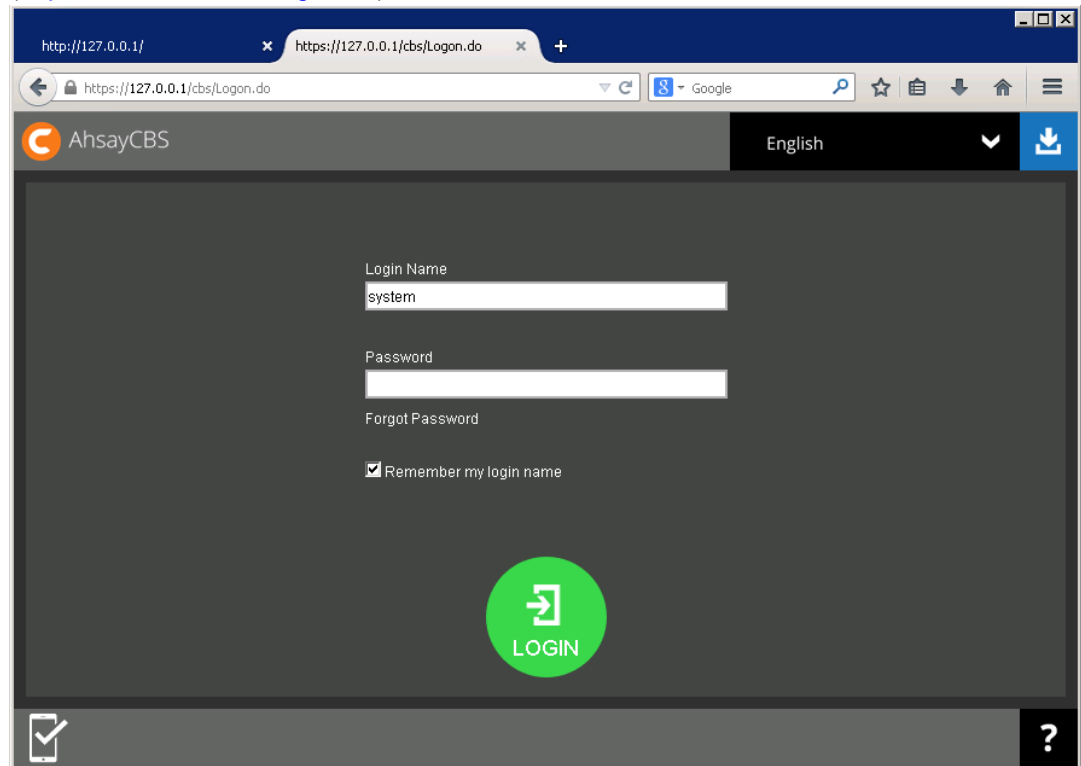

## Installation on Linux

1. Log in as root on your Linux machine.

```
login as: root
root@10.21.4.28's password:
Last login: Wed Nov  2 11:35:06 2016 from ckf-de-
iphone.ahsayhqt.local
[root@cos6x ~]#
```

2. Download the AhsayCBS installation package **cbs-nix.tar.gz** from the [Ahsay website](#) with **wget** command.
3. Make a directory to **/usr/local/cbs** and copy the installation file **cbs-nix.tar.gz** to the **/usr/local/cbs** directory. Then, run **tar** as follows:

```
# mkdir /usr/local/cbs
# cp cbs-nix.tar.gz /usr/local/cbs
# tar xvfz cbs-nix.tar.gz
```

4. After the tar process, install and start AhsayCBS using the **install.sh** command:

```
# /usr/local/cbs/bin/install.sh
```

5. When AhsayCBS is started, the following output will appear:

```
# sh install.sh
Log Time: Wed Nov  2 11:37:47 HKT 2016

Verifying current user privilege ...
Current user has enough privilege to "install".

Start configuration on Generic Linux Platform (Linux)
Using CBS_HOME /usr/local/cbs
Current Directory: "/usr/local/cbs".
Created symlink "java" to "java-linux-x64".
Minimum supported JVM version: 1.7
Current JVM version is supported for installation.
Installing [ Ahsay Cloud Backup Suite ]
[ Ahsay Cloud Backup Suite ] Service Script created at
/usr/local/cbs/bin/cbs
Install Service for NIX type OS
Using init script path /etc/init.d
Using run level script path /etc/rc.d
Copying script cbs to /etc/init.d
Creating symbolic link to run levels
You may start this service by:

sh "/etc/init.d/cbs" start &

[ Ahsay Cloud Backup Suite ] setup completed!
```

```

Migrate from previous version
/usr/local/cbs
Get Startup path for NIX type OS
RDR_HOME
OBS_HOME
OBSR_HOME
RPS_HOME
Run MigrateV6 script
Startup [ Ahsay Cloud Backup Suite ]
-----
-----
You may set SYSTEM_DEBUG=0 to disable the debug message
-----
-----
Current User Name      : root
Using SYSTEM_TYPE      : linux
Using SYSTEM_ARCH      : x86_64
Using PHYSICAL_MEM     : 997 (MB)
-----
-----
Using CBS_HOME          : /usr/local/cbs
Using JAVA_HOME         : /usr/local/cbs/java
Using CATALINA_HOME     : /usr/local/cbs/tomcat
Using JAVA_OPTS         : -
Djava.library.path=/usr/local/cbs/lib/LinX64 -
DCATALINA_PID=/var/run/obsr.pid -Xrs -Xms128m -Xmx1024m -
Xss384k -XX:PermSize=64m -XX:MaxPermSize=128m -
XX:MaxDirectMemorySize=512m -XX:NewRatio=4 -
XX:SurvivorRatio=4 -XX:MinHeapFreeRatio=25 -
XX:MaxHeapFreeRatio=50 -XX:+UseParNewGC -
XX:+UseConcMarkSweepGC -Dsun.net.inetaddr.ttl=3600 -
Dnetworkaddress.cache.ttl=3600 -
Dsun.net.inetaddr.negative.ttl=300 -
Dnetworkaddress.cache.negative.ttl=300 -
Dsun.nio.PageAlignDirectMemory=true -
Djava.net.preferIPv4Stack=true -
Djava.util.logging.manager=org.apache.juli.ClassLoaderLogM
anager -
Djava.util.logging.config.file=conf/logging.properties -
Dtc.work.path=work -Dtc.log.path=logs -
Djavax.servlet.context.tempdir=work
Using CATALINA_OPTS :
Using CATALINA_PID  : /var/run/obsr.pid
-----
-----
Starting AhsayCBS service
Started [ Ahsay Cloud Backup Suite ]
Installing [ NFS Service (Ahsay Systems Corporation) ]
[ NFS Service (Ahsay Systems Corporation) ] Service Script
created at /usr/local/cbs/nfs/bin/cbsnfs
Install Service for NIX type OS
Using init script path /etc/init.d
Using run level script path /etc/rc.d

```

```

Copying script cbsnfs to /etc/init.d
Creating symbolic link to run levels
You may start this service by:

sh "/etc/init.d/cbsnfs" start &

[ NFS Service (Ahsay Systems Corporation) ] setup
completed!
Startup [ NFS Service (Ahsay Systems Corporation) ]
Starting NFS Service (Ahsay Systems Corporation)
Started [ NFS Service (Ahsay Systems Corporation) ]

```

### Note

On some Linux systems, the installation may appear to pause after displaying Starting AhsayCBS service. If this occurs, press the space bar to complete the installation.

6. Check if Java is running on AhsayCBS with the `ps -ef|grep java` command.

```
# ps -ef|grep java
```

7. The following output shows that Java is running on AhsayCBS.

```

# ps -ef|grep java
root      3736      1   0 Nov02 ?          00:06:58
/usr/local/cbs/java/bin/java -
Djava.util.logging.config.file=/usr/local/cbs/conf/loggi
ng.properties -
Djava.util.logging.manager=org.apache.juli.ClassLoaderLo
gManager -Djava.library.path=/usr/local/cbs/lib/LinX64 -
DCATALINA_PID=/var/run/obsr.pid -Xrs -Xms128m -Xmx1024m
-Xss384k -XX:PermSize=64m -XX:MaxPermSize=128m -
XX:MaxDirectMemorySize=512m -XX:NewRatio=4 -
XX:SurvivorRatio=4 -XX:MinHeapFreeRatio=25 -
XX:MaxHeapFreeRatio=50 -XX:+UseParNewGC -
XX:+UseConcMarkSweepGC -Dsun.net.inetaddr.ttl=3600 -
Dnetworkaddress.cache.ttl=3600 -
Dsun.net.inetaddr.negative.ttl=300 -
Dnetworkaddress.cache.negative.ttl=300 -
Dsun.nio.PageAlignDirectMemory=true -
Djava.net.preferIPv4Stack=true -
Djava.util.logging.manager=org.apache.juli.ClassLoaderLo
gManager -
Djava.util.logging.config.file=conf/logging.properties -
Dtc.work.path=work -Dtc.log.path=logs -
Djavax.servlet.context.tempdir=work -
Djava.endorsed.dirs=/usr/local/cbs/tomcat/endorsed -
classpath
/usr/local/cbs/tomcat/bin/bootstrap.jar:/usr/local/cbs/t
omcat/bin/tomcat-juli.jar -Dcatalina.base=/usr/local/cbs
-Dcatalina.home=/usr/local/cbs/tomcat -
Djava.io.tmpdir=/usr/local/cbs/temp
org.apache.catalina.startup.Bootstrap start
root      14833 14326   0 19:09 pts/0    00:00:00 grep
java

```

8. Check if NFS Service is running on AhsayCBS with the `ps -ef|grep nfs` command.

```
# ps -ef|grep nfs
```

9. The following output shows that NFS Service is running on AhsayCBS.

```
# ps -ef|grep nfs
root      19067      1  0 11:38 ?          00:00:00
/usr/local/cbs/nfs/bin/NfsLinX64 -logfile
/usr/local/cbs/nfs/log/debug.log -pidfile
/var/run/cbsnfs.pid
root      19483 19457  0 12:07 pts/0      00:00:00 grep nfs
```

10. Check if AhsayCBS is listening to the pre-defined **http** and **https** ports, i.e. ports **80** and **443** with the `netstat -pan|more` command.

```
# netstat -pan|more
```


11. The following output shows that AhsayCBS is listening to both ports.

```
Active Internet connections (servers and established)
Proto Recv-Q Send-Q Local Address           Foreign Address         State
tcp        0      0 0.0.0.0:111             0.0.0.0:*               LISTEN
tcp        0      0 0.0.0.0:80              0.0.0.0:*               LISTEN
tcp        0      0 0.0.0.0:22              0.0.0.0:*               LISTEN
tcp        0      0 127.0.0.1:60024         0.0.0.0:*               LISTEN
tcp        0      0 127.0.0.1:25            0.0.0.0:*               LISTEN
tcp        0      0 0.0.0.0:443             0.0.0.0:*               LISTEN
tcp        0      0 0.0.0.0:54178           0.0.0.0:*               LISTEN
tcp        86      0 10.16.4.28:33250        203.186.85.237:443      CLOSE_WAIT
tcp        86      0 10.16.4.28:60738        203.186.85.237:443      CLOSE_WAIT
tcp        52      0 10.16.4.28:22           192.168.7.104:1318      ESTABLISHED
tcp        86      0 10.16.4.28:33251        203.186.85.237:443      CLOSE_WAIT
tcp        0      0 :::111                  :::*                     LISTEN
tcp        0      0 :::22                   :::*                     LISTEN
tcp        0      0 :::45846                 :::*                     LISTEN
udp        0      0 0.0.0.0:5353           0.0.0.0:*               LISTEN
udp        0      0 0.0.0.0:111            0.0.0.0:*               LISTEN
udp        0      0 0.0.0.0:897             0.0.0.0:*               LISTEN
udp        0      0 0.0.0.0:44431           0.0.0.0:*               LISTEN
```



udp	0	0 0.0.0.0:10000	0.0.0.0:*
3736/java			
udp	0	0 0.0.0.0:805	0.0.0.0:*
1478/rpcbind			
udp	0	0 0.0.0.0:43587	0.0.0.0:*
1569/rpc.statd			
udp	0	0 :::111	:::*
1478/rpcbind			
udp	0	0 :::805	:::*
1478/rpcbind			
udp	0	0 :::42700	:::*
1569/rpc.statd			

12. After successful installation, you can access the login page by opening <https://<your-backup-server>> in a browser.

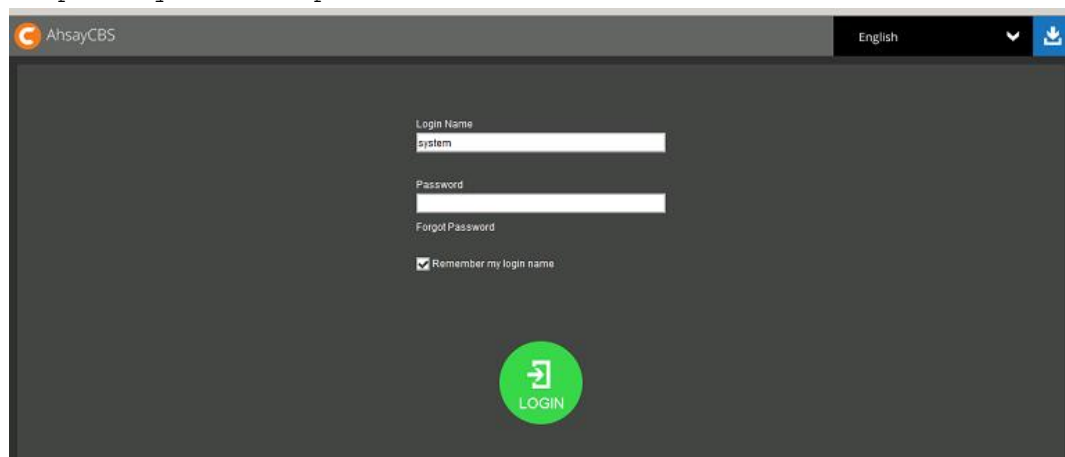

## Installation on FreeBSD

### Pre-requisite requirements:

Make sure OpenJDK Version 1.7.0\_76 has been installed beforehand. As the bundle java is removed, AhsayCBS requires OpenJDK to work on a FreeBSD machine. Also GNU C Library must be installed on FreeBSD to support AhsayCBS NFS service.

- Ahsay CBS installation path: /usr/local/cbs
- OpenJDK installation path: /usr/local/openjdk7
- Install GNU C Library:
  - Login to the AhsayCBS server as root
  - Change working directory to /usr/ports/misc/compat9x and add additional ports.

```
cd /usr/ports/misc/compat9x
```

- make installation

```
make install distclean
```

1. Log in as root on your FreeBSD machine.

```
login as: root
Using keyboard-interactive authentication.
Password for root@fbsd10-4-45:
```

2. Download the AhsayCBS installation file **cbs-nix.tar.gz** from the [Ahsay website](#) with **fetch** command.

3. Create a directory /usr/local/cbs for the AhsayCBS installation.

```
mkdir -p /usr/local/cbs
```

4. Copy the installation file **cbs-nix.tar.gz** to /usr/local/cbs.

```
cp cbs-nix.tar.gz /usr/local/cbs
```

5. Go to the /usr/local/cbs directory.

```
cd /usr/local/cbs
```

6. Unzip and extract the installation files with the following **tar** command.

```
tar xvfz cbs-nix.tar.gz
```

7. Get a list of all files with the **ls -la** command. You will see the bundle java (e.g. java-linux-x64 and java-linux-x86) in the list.

```
root@fbsd10-4-45:/usr/local/cbs # ls -la
total 533108
drwxr-xr-x  19 root  wheel      512 Nov  2 14:46 .
drwxr-xr-x  20 root  wheel      512 Nov  2 14:38 ..
drwxr-xr-x   7 root  wheel      512 Nov  2 14:46 bin
drwxr-xr-x   4 root  wheel      512 Sep 22 14:21 build
```

```

-rw-r--r-- 1 root wheel 545601781 Nov 2 14:43 cbs-
nix.tar.gz
drwxr-xr-x 2 root wheel      1024 Nov 2 14:46 conf
drwxr-xr-x 5 root wheel      512 Nov 2 14:46 download
drwxr-xr-x 2 root wheel      512 Sep 22 14:21 font
drwxr-xr-x 2 root wheel      512 Sep 27 17:23 icons
drwxr-xr-x 6 root wheel      512 Nov 2 14:46 java-linux-
x64
drwxr-xr-x 6 root wheel      512 Nov 2 14:46 java-linux-
x86
drwxr-xr-x 7 root wheel     5120 Nov 2 14:46 lib
drwxr-xr-x 7 root wheel      512 Nov 2 14:46 licenses
drwxr-xr-x 2 root wheel      512 Jan 15 2016 logs
drwxr-xr-x 3 root wheel      512 Sep 27 17:23 nfs
drwxr-xr-x 2 root wheel      512 Jan 15 2016 temp
drwxr-xr-x 2 root wheel     1024 Nov 2 14:46 termsfuse
drwxr-xr-x 5 root wheel      512 Nov 2 14:46 tomcat
drwxr-xr-x 4 root wheel      512 Sep 27 17:23 util
-rwxr-xr-x 1 root wheel        7 Sep 27 16:42 version.txt
drwxr-xr-x 7 root wheel      512 Sep 22 14:21 webapps

```

8. Remove the bundle java java-linux-x64 and java-linux-x86 with the following commands respectively.

```

rm -fr java-linux-x64
rm -fr java-linux-x86

```

9. To get ready for installation, create a symbolic link as a reference to the actual java file from the /usr/local/openjdk7/ folder.

```

ln -s /usr/local/openjdk7/ java

```

10. Get a list of all files with the `ls -la` command to ensure that the symbolic link creation is successful.

```

root@fbsd10-4-45:/usr/local/cbs # ls -la
total 533100
drwxr-xr-x 17 root wheel      512 Nov 2 14:50 .
drwxr-xr-x 20 root wheel      512 Nov 2 14:38 ..
drwxr-xr-x  7 root wheel      512 Nov 2 14:46 bin
drwxr-xr-x  4 root wheel      512 Sep 22 14:21 build
-rw-r--r--  1 root wheel 545601781 Nov 2 14:43 cbs-
nix.tar.gz
drwxr-xr-x  2 root wheel     1024 Nov 2 14:46 conf
drwxr-xr-x  5 root wheel      512 Nov 2 14:46 download
drwxr-xr-x  2 root wheel      512 Sep 22 14:21 font
drwxr-xr-x  2 root wheel      512 Sep 27 17:23 icons
lrwxr-xr-x  1 root wheel      20 Nov 2 14:50 java ->
/usr/local/openjdk7/
drwxr-xr-x  7 root wheel     5120 Nov 2 14:46 lib
drwxr-xr-x  7 root wheel      512 Nov 2 14:46 licenses
drwxr-xr-x  2 root wheel      512 Jan 15 2016 logs
drwxr-xr-x  3 root wheel      512 Sep 27 17:23 nfs
drwxr-xr-x  2 root wheel      512 Jan 15 2016 temp
drwxr-xr-x  2 root wheel     1024 Nov 2 14:46 termsfuse
drwxr-xr-x  5 root wheel      512 Nov 2 14:46 tomcat
drwxr-xr-x  4 root wheel      512 Sep 27 17:23 util
-rwxr-xr-x  1 root wheel        7 Sep 27 16:42 version.txt
drwxr-xr-x  7 root wheel      512 Sep 22 14:21 webapps

```

11. Go to the `/usr/local/cbs/bin` directory.

```
cd /usr/local/cbs/bin
```

12. To execute the installation file, type the following command:

```
sh install.sh
```

After successful installation, the screen will look like the following:

```
root@fbbsd10-4-45:/usr/local/cbs/bin # sh install.sh
Log Time: Wed Nov  2 14:51:29 HKT 2016

Verifying current user privilege ...
Current user has enough privilege to "install".

Start configuration on BSD distribution Platform
(FreeBSD)
Using CBS_HOME /usr/local/cbs
JVM symbolic link already exists, it will be used for
installation.
Minimum supported JVM version: 1.7
Current JVM version is supported for installation.
Installing [ Ahsay Cloud Backup Suite ]
[ Ahsay Cloud Backup Suite ] Service Script created at
/usr/local/cbs/bin/cbs
Install Service for BSD type OS
Copying script cbs to /usr/local/etc/rc.d
You may start this service by:

sh "/usr/local/etc/rc.d/cbs" start &

Remember to add an entry: cbs_enable="YES" to
/etc/rc.conf

[ Ahsay Cloud Backup Suite ] setup completed!
Migrate from previous version
/usr/local/cbs
Get Startup path for BSD type OS
RDR_HOME
OBS_HOME
OBSR_HOME /usr/local/cbs
RPS_HOME
Run MigrateV6 script
Startup [ Ahsay Cloud Backup Suite ]
-----
-----
You may set SYSTEM_DEBUG=0 to disable the debug message
-----
-----
Current User Name      : root
Using SYSTEM_TYPE      : bsd
Using SYSTEM_ARCH      : i386
Using PHYSICAL_MEM     : 2027 (MB)
-----
```

```

-----
Using CBS_HOME      : /usr/local/cbs
Using JAVA_HOME     : /usr/local/cbs/java
Using CATALINA_HOME : /usr/local/cbs/tomcat
Using JAVA_OPTS     : -
Djava.library.path=/usr/local/cbs/lib/FbdX86 -
DCATALINA_PID=/var/run/obsr.pid -Xrs -Xms128m -Xmx1024m -
Xss384k -XX:PermSize=64m -XX:MaxPermSize=128m -
XX:MaxDirectMemorySize=512m -XX:NewRatio=4 -
XX:SurvivorRatio=4 -XX:MinHeapFreeRatio=25 -
XX:MaxHeapFreeRatio=50 -XX:+UseParNewGC -
XX:+UseConcMarkSweepGC -Dsun.net.inetaddr.ttl=3600 -
Dnetworkaddress.cache.ttl=3600 -
Dsun.net.inetaddr.negative.ttl=300 -
Dnetworkaddress.cache.negative.ttl=300 -
Dsun.nio.PageAlignDirectMemory=true -
Djava.net.preferIPv4Stack=true -
Djava.util.logging.manager=org.apache.juli.ClassLoaderLog
Manager -
Djava.util.logging.config.file=conf/logging.properties -
Dtc.work.path=work -Dtc.log.path=logs -
Djavax.servlet.context.tempdir=work
Using CATALINA_OPTS :
Using CATALINA_PID  : /var/run/obsr.pid
-----

Starting AhsayCBS service
Started [ Ahsay Cloud Backup Suite ]
Installing [ NFS Service (Ahsay Systems Corporation) ]
[ NFS Service (Ahsay Systems Corporation) ] Service
Script created at /usr/local/cbs/nfs/bin/cbsnfs
Install Service for BSD type OS
Copying script cbsnfs to /usr/local/etc/rc.d
You may start this service by:

sh "/usr/local/etc/rc.d/cbsnfs" start &

Remember to add an entry: cbsnfs_enable="YES" to
/etc/rc.conf

[ NFS Service (Ahsay Systems Corporation) ] setup
completed!
Startup [ NFS Service (Ahsay Systems Corporation) ]
Starting NFS Service (Ahsay Systems Corporation)
Started [ NFS Service (Ahsay Systems Corporation) ]

```

13. Check if Java is running on AhsayCBS with the `ps -aux|grep java` command.

```
# ps -aux|grep java
```

14. The following output shows that Java is running on AhsayCBS.

```

root          45081  48.6 11.3 1377348 233664  1  S
2:51PM       0:40.66 /usr/local/cbs/java/bin/java -

```

```
Djava.util.logging.config.file=/usr/local/cbs/conf/logg
root      45141    0.0  0.1   10280   1580   1  S+
2:52PM    0:00.00 grep java
```

15. Check if NFS Service is running on AhsayCBS with the `ps -aux|grep nfs` command.

```
# ps -aux|grep nfs
```

16. The following output shows that NFS Service is running on AhsayCBS.

```
root@fbsd10-4-45:/usr/local/cbs/bin # ps -aux|grep nfs
root      45105    0.0  0.1   11804   2736   1  I
2:51PM    0:00.09 /usr/local/cbs/nfs/bin/NfsFbdX86 -
logfile /usr/local/cbs/nfs/log/debug.log -pidfile /
root      45144    0.0  0.1   10280   1572   1  S+
2:52PM    0:00.01 grep nfs
```

17. Check if AhsayCBS is listening to both pre-defined **http** and **https** ports (i.e. Ports 80 and 443) with the `netstat -an|more` command.

```
# netstat -an|more
```

18. In the following screenshot, AhsayCBS is listening to both ports:

```
Active Internet connections (including servers)
Proto Recv-Q Send-Q Local Address           Foreign Address
(state)
tcp4      0      0 127.0.0.1.60024         *.*
LISTEN
tcp4      85      0 10.16.4.45.36242        203.186.85.237.443
CLOSE_WAIT
tcp4      0      0 10.16.4.45.443          10.20.1.37.51021
ESTABLISHED
tcp4      85      0 10.16.4.45.60497        203.186.85.237.443
CLOSE_WAIT
tcp4      0      0 *.443                   *.*
LISTEN
tcp4      0      0 *.80                     *.*
LISTEN
tcp4      0      0 10.16.4.45.22           192.168.7.104.3983
ESTABLISHED
tcp4      0      0 10.16.4.45.22           192.168.7.104.3956
ESTABLISHED
tcp4      0      0 10.16.4.45.22           192.168.7.117.4617
ESTABLISHED
tcp4      0      0 10.16.4.45.952          192.168.22.40.2049
ESTABLISHED
tcp4      0      0 10.16.4.45.788          192.168.22.40.2049
ESTABLISHED
tcp4      0      0 *.44097                  *.*
LISTEN
tcp6      0      0 *.31178                  *.*
LISTEN
tcp4      0      0 127.0.0.1.25            *.*
LISTEN
tcp4      0      0 *.22                     *.*
LISTEN
tcp6      0      0 *.22                     *.*
```


LISTEN				
udp4	0	0 *.10000		*.*
udp4	0	0 *.51313		*.*
udp4	0	0 *.5353		*.*
udp4	0	0 *.514		*.*
udp6	0	0 *.514		*.*

19. After successful installation, you can access the login page by opening <https://<your-backup-server>> in a browser.

## 5 Basic Setup and Configuration

### Activating License


1. Open AhsayCBS from your browser, e.g. <https://<your-backup-server>>.

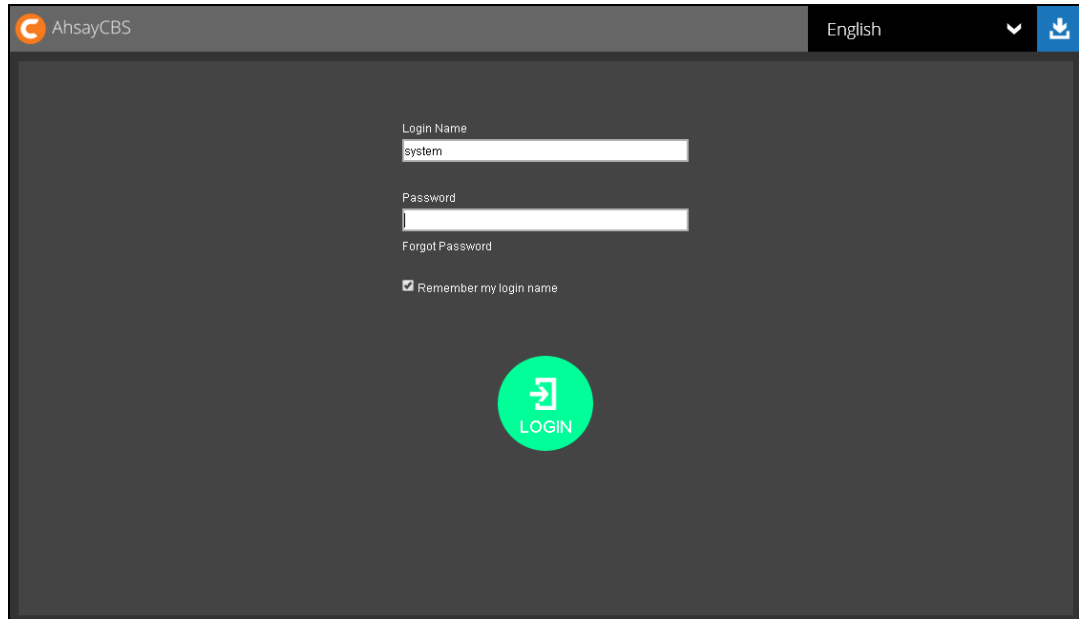

2. Log in to the AhsayCBS with the following default credentials.

- Login name: system
- Password: system


3. To activate the license, click the **License** icon.

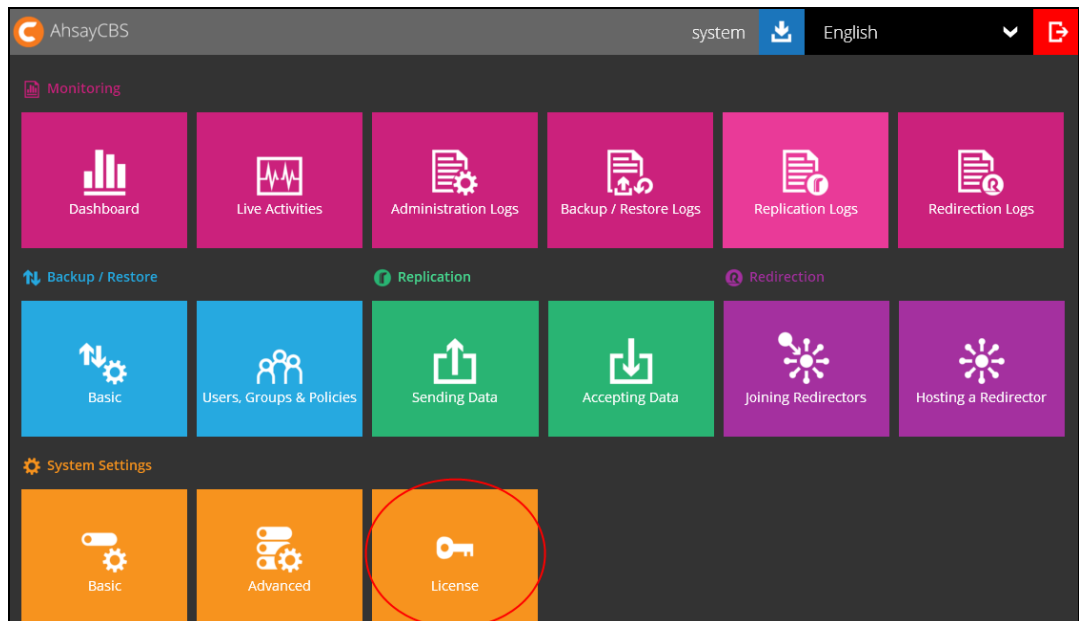



4. Applying the license key

- If you are evaluating the AhsayCBS, you can use the evaluation license key provided on the page by default and click the **Update** button.
- If you have a purchased license, copy and paste the licensee name, license key into the relevant field, then click the **Update** button.

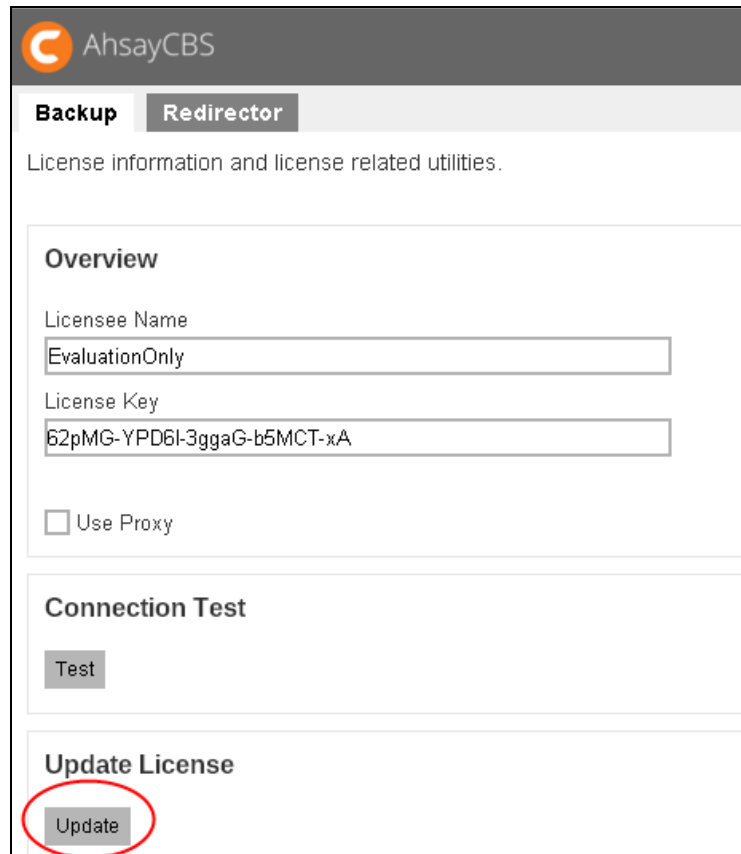

AhsayCBS

**Backup** **Redirector**

License information and license related utilities.

**Overview**

Licensee Name  
EvaluationOnly

License Key  
62pMG-YPD6I-3ggaG-b5MCT-xA

☐ Use Proxy


**Connection Test**

Test

**Update License**

Update

5. Click the green **Save** icon at the bottom right corner of the page to save the settings.

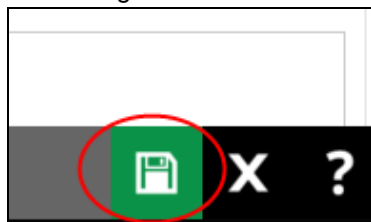


**Note**

If you are using the evaluation license key, you will be able to evaluate the AhsayCBS for 60 days. After which the AhsayCBS service will automatically stop working. Although the service is still active, the AhsayOBM and AhsayACB clients will not be able to connect to perform any backups or restores. If you would like to continue to use AhsayCBS, please contact the Sales team at Ahsay by email at [sales-kb@ahsay.com](mailto:sales-kb@ahsay.com) or call our International Sales Hotline +852 3580 8091.


## Setting up User Home

Set up a user home in your AhsayCBS to store the user's information and back up files in your local location.

1. Click the blue **Basic** icon on the AhsayCBS main page.

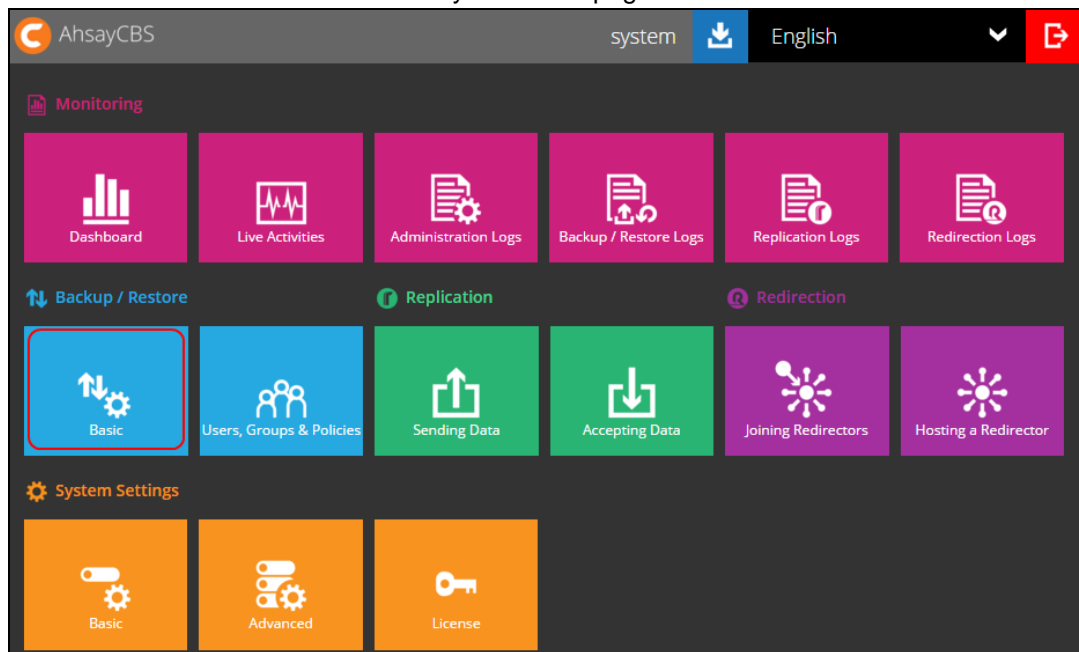

2. In the **User Home** tab, click the + icon.

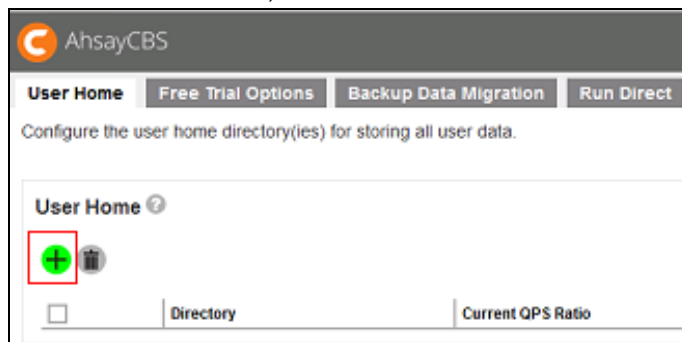

3. Enter the directory path in the **Home Directory** field (e.g. **D:\my\_user\_home**) and click the **+** icon at the bottom right corner when done.

## User Home

Home Directory

D:\my\_user\_home

☐ Password protected network drive

Maximum QPS Ratio

Unlimited ▼

### Note

It is NOT suggested to store your user home in your system partition, e.g. **C:\**.

4. Click the **Save** icon at the bottom right corner to save the new user home settings.



### Note


For cloud setup, please refer to Ahsay Cloud Backup Suite Administrator's guide via the URL below.

[https://www.ahsay.com/download/download\\_document\\_cbs-admin.jsp](https://www.ahsay.com/download/download_document_cbs-admin.jsp)



## Setting up SMTP

Configure the SMTP so that you can receive reports from the AhsayCBS.

1. Click the orange **Basic** icon under **System Settings** section on AhsayCBS main page.

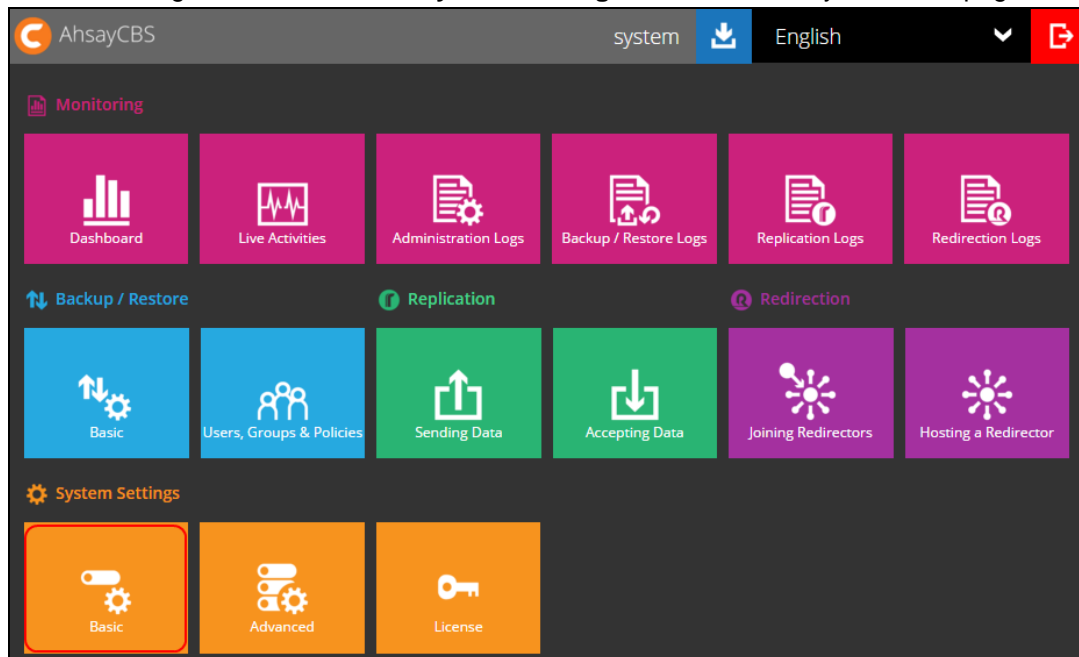

2. In the **Email** tab, locate the **SMTP Server** section. Then, click the + button.

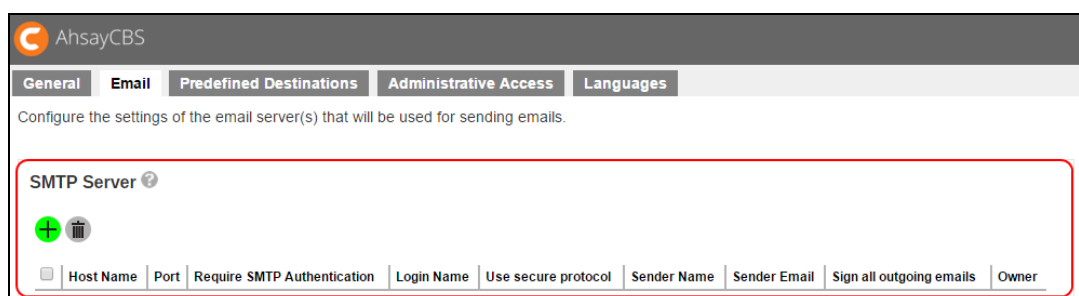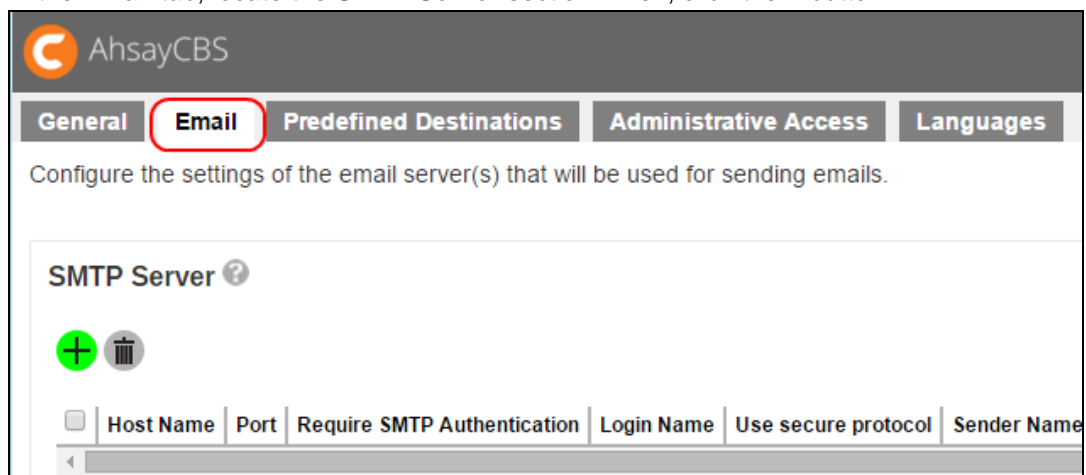

AhsayCBS

General Email Predefined Destinations Administrative Access Languages

Configure the settings of the email server(s) that will be used for sending emails.

SMTP Server ?

+ -

☐ Host Name Port Require SMTP Authentication Login Name Use secure protocol Sender Name

3. Enter the SMTP mail server settings in the **Host Name** and **Port** fields.

## Add New SMTP Server

Add a new SMTP server below for sending emails

### SMTP Server Settings

Host Name

smtp.mycompany.com

Port

25


4. If authentication is required, check the checkbox next to **Require SMTP Authentication** and then enter the **Login Name** and **Password**.

☒ Require SMTP Authentication

Login Name

Password

**Optional:** Check the checkbox **Use secure protocol** if required. Select the type of **Protocol** from the drop-down box.

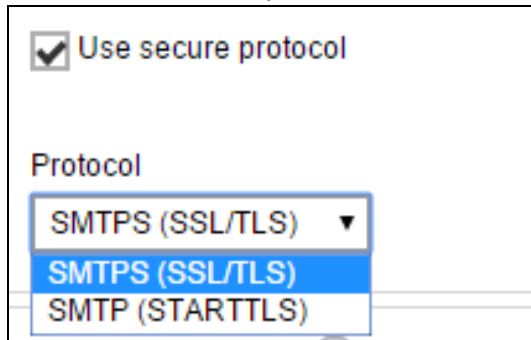


The screenshot shows a form section with a checkbox labeled "Use secure protocol" which is checked. Below it is a dropdown menu labeled "Protocol" with three options: "SMTPS (SSL/TLS)" (selected), "SMTPS (SSL/TLS)", and "SMTP (STARTTLS)".

5. Enter the report sender's name and email address.



The screenshot shows a form titled "Report Sender" with a question mark icon. It contains two text input fields: "Name" with the value "Administrator" and "EMail" with the value "admin@mycompany.com". Below these fields is a checkbox labeled "Sign all outgoing emails digitally (S/MIME)" which is unchecked.

6. Click the tick icon at the bottom right corner to save the SMTP settings.

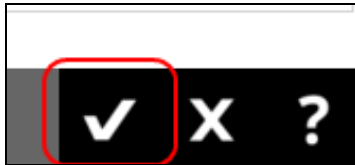

7. Click the **Save** icon at the bottom right corner to save the settings.



**Note**

If you don't have a SMTP server, you can consider using a free SMTP such as Gmail.

## Setting up Hostname & System Home

Configure the AhsayCBS hostname and system home path.

The screenshot shows the AhsayCBS configuration window with the 'General' tab selected. The interface includes tabs for 'Email', 'Predefined Destinations', 'Administrative Access', and 'Languages'. Below the tabs, a message states 'Configure the basic settings for this server below.' The 'Host' section has a 'Host Name' field containing '10.214.39'. The 'System Home' section has a 'System home directory' field containing 'G:\Ahsay\System'. The 'Connectors' section shows a table with two entries: one for HTTP on port 80 and one for HTTPS on port 443. The 'SSL Certificate' section shows an empty table with columns for Name, Common Name, Organization Unit, Organization Name, Location, State, Country, Expiry Date, and Status. At the bottom right, there are icons for save, close, and help.

IP	Port	Protocol	Max Connection	Connection Timeout	Max Keep Alive Request	SSL Certificate
0.0.0.0	80	HTTP	2000	120000	1000	--
0.0.0.0	443	HTTPS	2000	120000	1000	--


Name	Common Name	Organization Unit	Organization Name	Location	State	Country	Expiry Date	Status
------	-------------	-------------------	-------------------	----------	-------	---------	-------------	--------

Section	Description
Host	<p>This is the host name of your AhsayCBS. You can enter the domain name of your AhsayCBS in the formats of "IP Address:port_number" or "<a href="http://www.mybackup.com:port_number">www.mybackup.com:port_number</a>"</p> <p><b>Note:</b> The <b>Host Name</b> will be the access link for your users to get access to the AhsayCBS. Since the host name will be used in various locations, such as inside welcome email as a reference point for the users to access the AhsayCBS, inside email as a reference link for the users to recover the password, users applying Run Direct restore feature, it is important to ensure the host name is accessible by users from external network environment.</p>
System Home	<p>This is the system home location of your AhsayCBS where the system logs and group policy files are located. This path is set to your installation home by default. For production systems the system home should not be setup on the O/S partition, as the logs could fill up the drive and result in system instability.</p>


## Creating User Account

Create a user account for the backup machine.

1. Click the **Users, Groups & Policies** icon under the **Backup / Restore** section on the AhsayCBS main page.

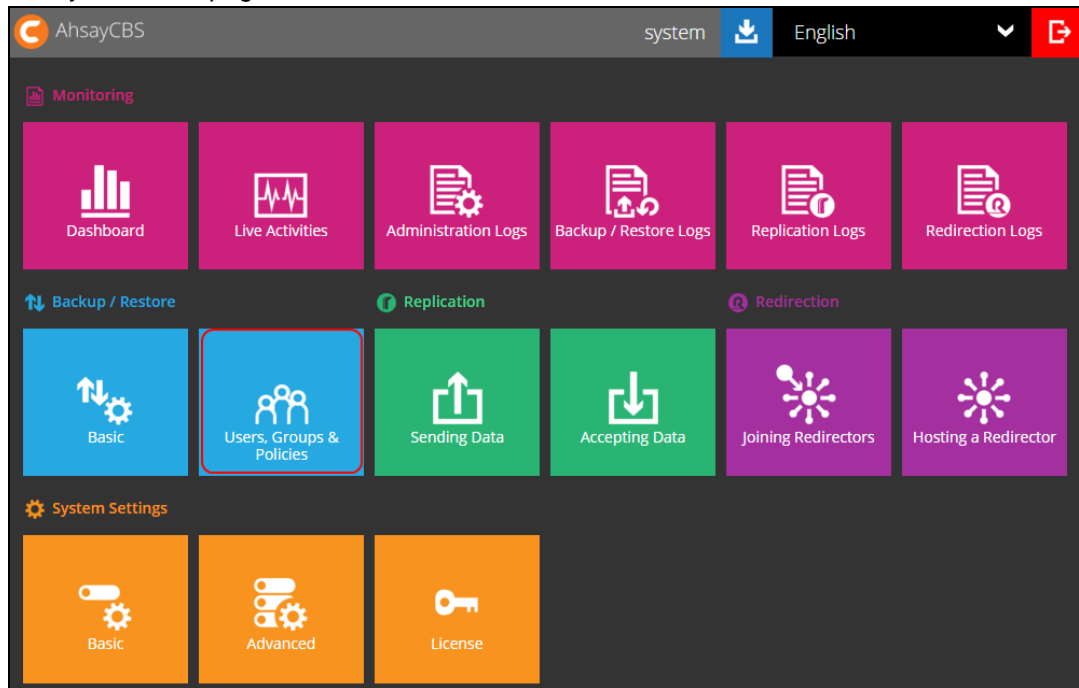


2. Click the + button to create a new user account.

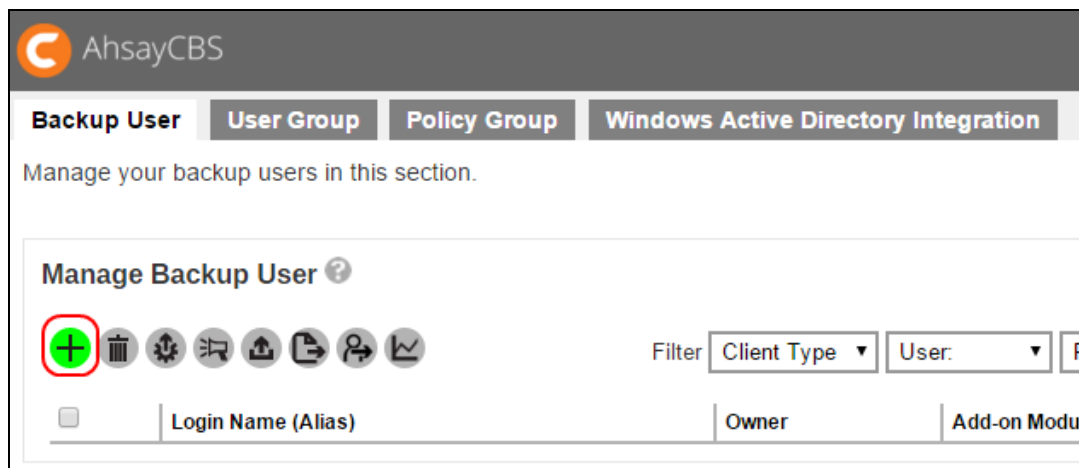



3. Enter the **Login Name** and **Password** in the relevant fields. The password should be at least 6 alphanumeric characters.

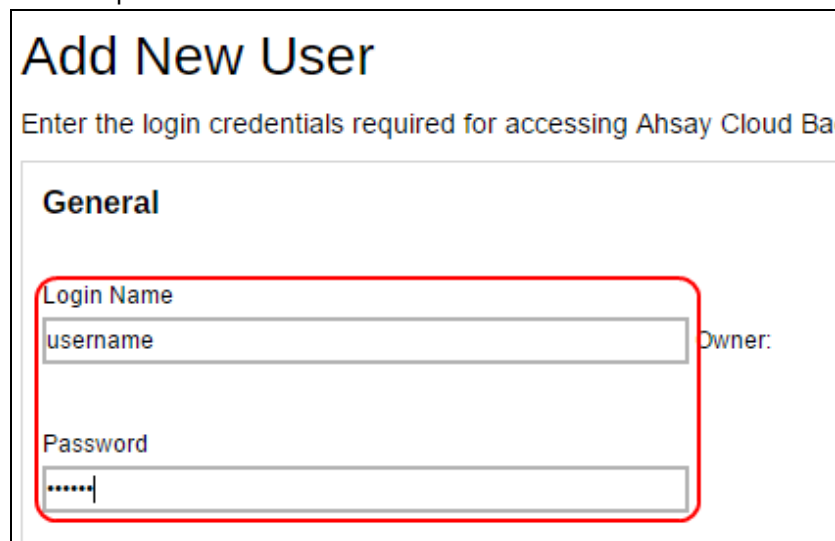

## Add New User

Enter the login credentials required for accessing Ahsay Cloud Backup


### General

Login Name  
username

Password  
.....

Owner:

**Optional:** Click the check box in front of the user group if you need to assign a user group for this user. The assignment can also be done later.

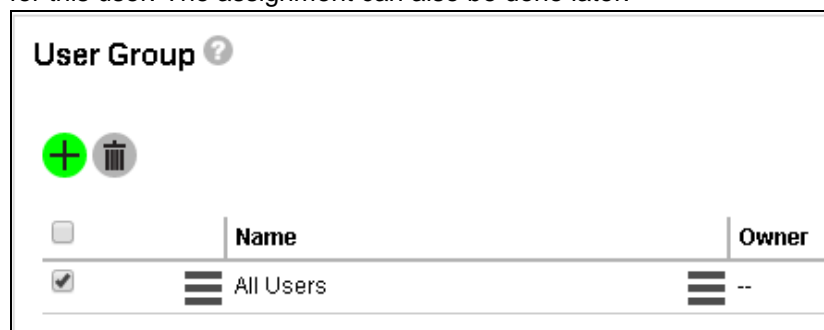


### User Group ?

+ -

<input type="checkbox"/>	Name	Owner
<input checked="" type="checkbox"/>	All Users	--

4. Click the ➔ icon at the bottom right corner to continue.

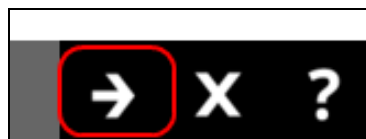

5. If you need to assign a dedicated storage location for the backup account, select **Manually assigned** and choose the storage location under the **Home Directory** section. If you select **Auto assigned**, you can skip this step.



## Home Directory

☐ Auto assigned

☒ Manually assigned

D:\my\_user\_home

**Optional:** **Alias** can be left empty if you do not know or do not want to enter the details at this stage.

6. Set the desired **Subscription Type**. Select **Paid User** if you are creating an account for a user with no expiration period. If you select **Trial User**, service will be suspended for this user on the date you specified under the **Suspend At** drop-down menu.

**Subscription Type**  
☒ Trial User  
☐ Paid User

**Suspend At**  
☐ 27-Jun-2016

7. Select the status for this user account.

**Status**  
☒ Enable  
☐ Suspended  
☐ Locked

8. By default, the **Upload Encryption Key** option is enabled. This is one of the three settings that requires to be turned on to fulfill the recovery purpose for the encryption key which will be sent to the backup server. This is useful when backup users have lost their key and Ahsay can recover the encryption key for them. For more details, refer to the **Recovering Encryption Key via AhsayCBS Web Console** section in the [AhsayCBS Administrator's Guide](#).

**Upload Encryption Key**  
☒ Upload encryption key after running backup for recovery

9. Select the language for this user.

**Language**  
English ▼

10. Select time zone for this user and then click the ➔ icon at the bottom right corner to continue.

### Timezone

GMT+08:00 (CST) ▼

GMT+05:00 (PKT)

GMT+05:00 (TFT)

GMT+05:00 (TJT)

GMT+05:00 (TMT)

GMT+05:00 (UZT)

GMT+05:30 (IST)

GMT+05:30 (LKT)

GMT+06:00 (ALMST)

GMT+06:00 (BDT)

GMT+06:00 (BTT)

GMT+06:00 (IOT)

GMT+06:00 (KGST)

GMT+06:00 (YEKST)

GMT+07:00 (CXT)

GMT+07:00 (ICT)

GMT+07:00 (JAVT)

GMT+07:00 (NOVT)

GMT+08:00 (BNT)

GMT+08:00 (BORT)

GMT+08:00 (CST)

11. Select the backup user type under the **Backup Client** section. If the backup client machine requires to backup files only, such as a desktop computer or a notebook, then you can simply create an AhsayACB backup account. Otherwise, you will need to set up AhsayOBM, because it comes with backup modules to perform Windows system backup, database backup and virtual machine backup.

### Backup Client


☐ AhsayOBM User
 ☒ AhsayACB User

12. Click the checkbox(es) to select the **Add-on Modules** for this backup user.

### Add-on Modules


<input checked="" type="checkbox"/> Microsoft Exchange Server	<input checked="" type="checkbox"/> Microsoft SQL Server
<input checked="" type="checkbox"/> MySQL Database Server	<input checked="" type="checkbox"/> Oracle Database Server
<input checked="" type="checkbox"/> Lotus Domino	<input checked="" type="checkbox"/> Lotus Notes
<input checked="" type="checkbox"/> Windows System Backup	<input checked="" type="checkbox"/> Windows System State Backup
<input checked="" type="checkbox"/> VMware <input type="text" value="Guest VM"/> <input type="text" value="100"/>	<input checked="" type="checkbox"/> Hyper-V <input type="text" value="Guest VM"/> <input type="text" value="100"/>
<input checked="" type="checkbox"/> Microsoft Exchange Mailbox <input type="text" value="100"/>	
<input checked="" type="checkbox"/> NAS	<input checked="" type="checkbox"/> ShadowProtect System Backup
<input checked="" type="checkbox"/> Volume Shadow Copy	<input checked="" type="checkbox"/> Continuous Data Protection
<input checked="" type="checkbox"/> In-File Delta	<input checked="" type="checkbox"/> Mobile <input type="text" value="10"/>
<input checked="" type="checkbox"/> Office 365 Exchange Online Backup <input type="text" value="10"/>	<input checked="" type="checkbox"/> OpenDirect / Granular Restore <input type="text" value="100"/>

13. Enter the backup quota value, and select the unit of this value from the drop-down box.

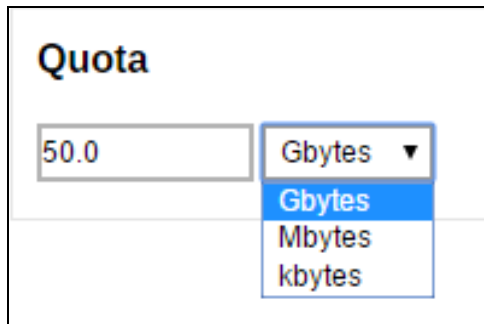


The screenshot shows a form titled "Quota". It contains a text input field with the value "50.0" and a dropdown menu currently set to "Gbytes". The dropdown menu is open, showing the following options: "Gbytes" (highlighted in blue), "Mbytes", and "kbytes".

14. By default the Client host limit is non-selected. You can check the checkbox and enter the client host limit value as needed.

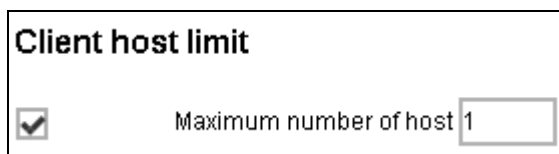


The screenshot shows a form titled "Client host limit". It contains a checked checkbox and a text input field with the value "1". The text "Maximum number of host" is displayed next to the input field.

15. By default the Run Direct is non-selected. You can check the checkbox and enter the maximum number of VM value as needed and then click the ➔ icon at the bottom right corner to continue.

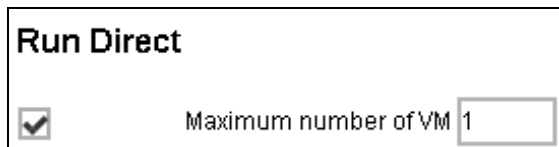

The screenshot shows a form titled "Run Direct". It contains a checked checkbox and a text input field with the value "1". The text "Maximum number of VM" is displayed next to the input field.

16. Click the + icon to add user's contact information.

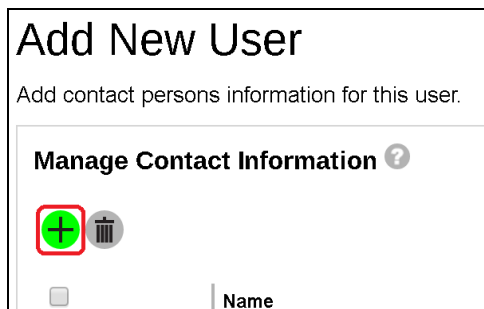

The screenshot shows a form titled "Add New User". Below the title is the text "Add contact persons information for this user." There is a section titled "Manage Contact Information" with a question mark icon. Below this section are two icons: a green circle with a white plus sign (+) and a grey circle with a white trash can icon. At the bottom of the form, there is a small square icon and a label "Name".

17. Fill in the contact details and then click the + icon at the bottom right corner to return to the previous **Add New User** page. Click the + icon at the bottom right corner again to continue.

### Contact

Name

username

Email

username@acompany.com

☐ Encrypt Email

Address

Company

Website

Phone 1

Phone 2



18. Click the **Save** icon at the bottom right corner to save the new user account information.




## 6 Download Backup / Restore Client

There are four backup/ restore clients for you to choose from:


- AhsayOBM and AhsayACB for computer users to backup and restore
- AhsayOBR for computer users to restore only
- AhsayMOB for mobile device users to backup and restore

### Download AhsayACB / AhsayOBM / AhsayOBR on Computer


1. In a browser, download the backup clients by clicking the blue **Download** icon at the top right corner on the AhsayCBS main page.

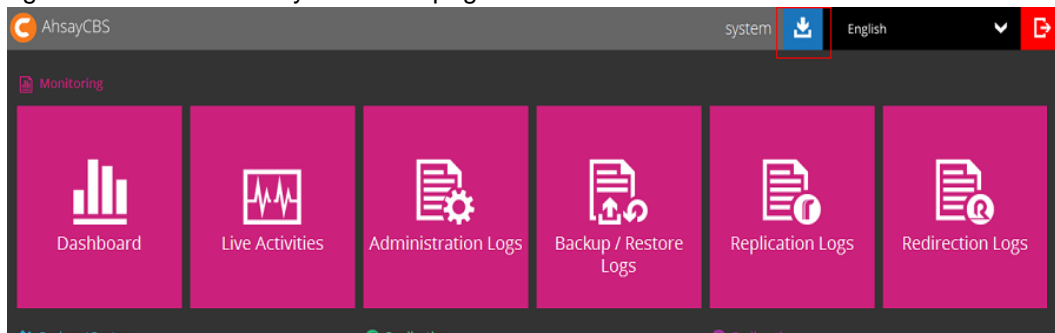

2. Click on the tab with the name of the client backup/ restore agent you wish to download, **AhsayOBM** tab, **AhsayACB** tab or **Restore** tab (**AhsayOBR**).

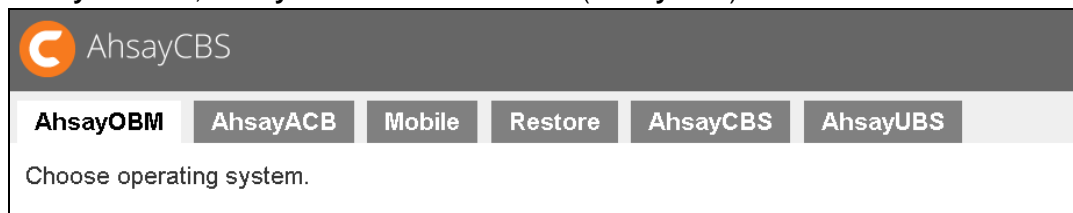

3. Click on the **Download (Online)** or **Download (Offline)** button of the platform on which you wish to install the client backup/ restore agent.

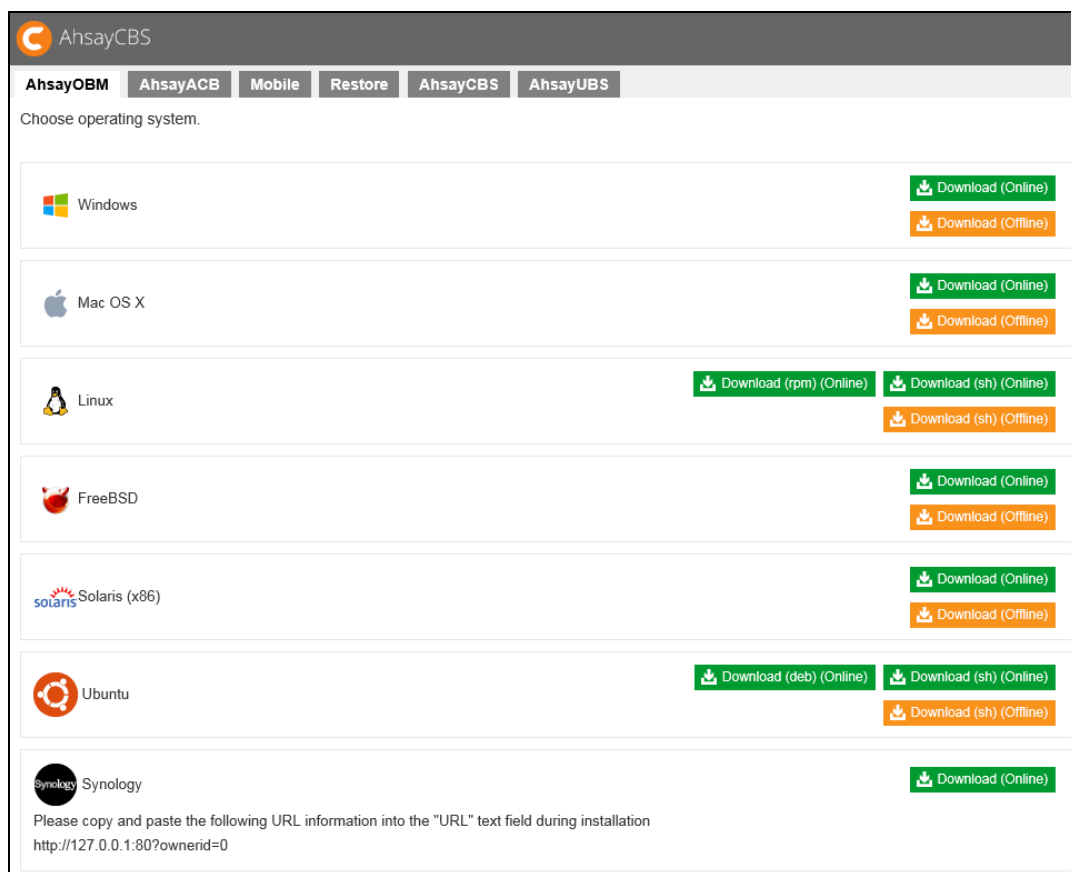

From v7.15.0.0 onwards AhsayCBS support two installation modes, online and offline installation (except for Linux (rpm), Ubuntu (deb) and Synology NAS which supports online installation only). User can apply either of the installation modes.

Below is the table of comparison between online installation and offline installation.

	Online Installation	Offline Installation
<b>Internet</b>	<ul style="list-style-type: none"> <li>➤ It cannot be started without an internet connection.</li> <li>➤ Clients need to have an internet connection each time an installation is run.</li> <li>➤ If the client internet connection is interrupted or is not stable the installation may be unsuccessful.</li> <li>➤ Online installer size is 6KB to 3.5MB depending on operating system as it contains only the initial installation package files.</li> </ul>	<ul style="list-style-type: none"> <li>➤ Once the offline installer is downloaded, the client does not require an internet connection each time an installation is run.</li> <li>➤ The offline installer size is 80MB to 140MB depending on operating system as it contains all the necessary binary and component files.</li> </ul>
<b>Backup Server Availability</b>	The online installer requires the backup server to be online in order to run and complete the installation.	An offline installation can be performed independently of the backup server availability.

<b>Installation Time</b>	<ul style="list-style-type: none"> <li>➤ Takes more time as it needs to download the binary and component files (80MB to 140MB depending on operating system) each time the installation is run.</li> <li>➤ A slow internet connection on the client machine will also result in longer installation time.</li> </ul>	Takes less time as all the necessary binary and components files are already available in the offline installer.
<b>Version Control</b>	Ensures the latest version of the product is installed.	May need to update the product version after installation if an older offline installer is used.
<b>Administrative Support</b>	Need more time on the support for the installation as network factor might lead to unsuccessful installation.	Need less time as independent of network factor influence.
<b>Deployments</b>	<ul style="list-style-type: none"> <li>➤ Suitable for single or small amount of device installations.</li> <li>➤ Suitable for client sites with fast and stable internet connection.</li> </ul>	<ul style="list-style-type: none"> <li>➤ Suitable for multiple or mass device installations.</li> <li>➤ Suitable for client sites with metered internet connections.</li> </ul>

## Download AhsayMOB on a Mobile Device

### Android Device

The latest version of AhsayMOB is available from Google Play.

### iOS Device

The latest version of AhsayMOB is available from Apple App Store.

## Instruction Regarding Installation of Client Backup Agent

For information about the installation of AhsayACB, AhsayOBM, AhsayOBR and AhsayMOB, creating backup sets and restoration, please refer to the User Guides/Quick Start Guides via the respective URL below.



<b>Windows</b>	<a href="http://ahsay.com/download/download_document_acb-quickstart-windows.jsp">http://ahsay.com/download/download_document_acb-quickstart-windows.jsp</a>
<b>Mac OS X</b>	<a href="http://ahsay.com/download/download_document_acb-quickstart-mac.jsp">http://ahsay.com/download/download_document_acb-quickstart-mac.jsp</a>





<b>Windows</b>	<a href="http://ahsay.com/download/download_document_obm-quickstart-windows.jsp">http://ahsay.com/download/download_document_obm-quickstart-windows.jsp</a>
<b>Mac OS X</b>	<a href="http://ahsay.com/download/download_document_obm-quickstart-mac.jsp">http://ahsay.com/download/download_document_obm-quickstart-mac.jsp</a>
<b>Linux (CLI)</b>	<a href="http://ahsay.com/download/download_document_obm-quickstart-linux.jsp">http://ahsay.com/download/download_document_obm-quickstart-linux.jsp</a>
<b>Linux (GUI)</b>	<a href="https://www.ahsay.com/download/download_document_obm-quickstart-linux-gui.jsp">https://www.ahsay.com/download/download_document_obm-quickstart-linux-gui.jsp</a>
<b>Synology NAS</b>	<a href="http://ahsay.com/download/download_document_obm-quickstart-synology.jsp">http://ahsay.com/download/download_document_obm-quickstart-synology.jsp</a>



<b>Windows</b>	<a href="https://www.ahsay.com/download/download_document_obr-user-guide-win.jsp">https://www.ahsay.com/download/download_document_obr-user-guide-win.jsp</a>
<b>Mac OS X</b>	<a href="https://www.ahsay.com/download/download_document_obr-user-guide-mac.jsp">https://www.ahsay.com/download/download_document_obr-user-guide-mac.jsp</a>
<b>Linux (GUI)</b>	<a href="https://www.ahsay.com/download/download_document_obr-user-guide-linux-gui.jsp">https://www.ahsay.com/download/download_document_obr-user-guide-linux-gui.jsp</a>



<b>Android</b>	<a href="https://ahsay.com/download/download_document_mob-user-guide-android.jsp">https://ahsay.com/download/download_document_mob-user-guide-android.jsp</a>
<b>iOS</b>	<a href="https://ahsay.com/download/download_document_mob-user-guide-ios.jsp">https://ahsay.com/download/download_document_mob-user-guide-ios.jsp</a>

## 7 Contacting Ahsay

### Technical Assistance

To contact Ahsay support representatives for technical assistance, visit the following website:

<https://www.ahsay.com/jsp/en/contact/kbQuestion.jsp>

Also use the Ahsay Knowledge Base for resource such as Hardware Compatibility List, Software Compatibility List, and other product information:

<https://forum.ahsay.com>

### Documentation

Documentations for all Ahsay products are available at:

[https://www.ahsay.com/jsp/en/home/index.jsp?pageContentKey=ahsay\\_downloads\\_documentation\\_guides](https://www.ahsay.com/jsp/en/home/index.jsp?pageContentKey=ahsay_downloads_documentation_guides)

You can send us suggestions for improvements or report on issues in the documentation, by contacting us at:


<https://www.ahsay.com/jsp/en/contact/kbQuestion.jsp>

The specific document title as well as the change required/suggestion when contacting us.


# Appendix

## Uninstall AhsayCBS on Windows


1. Go to **Control Panel > Programs and Features > Uninstall a program**, then look for **Ahsay Cloud Backup Suite**.

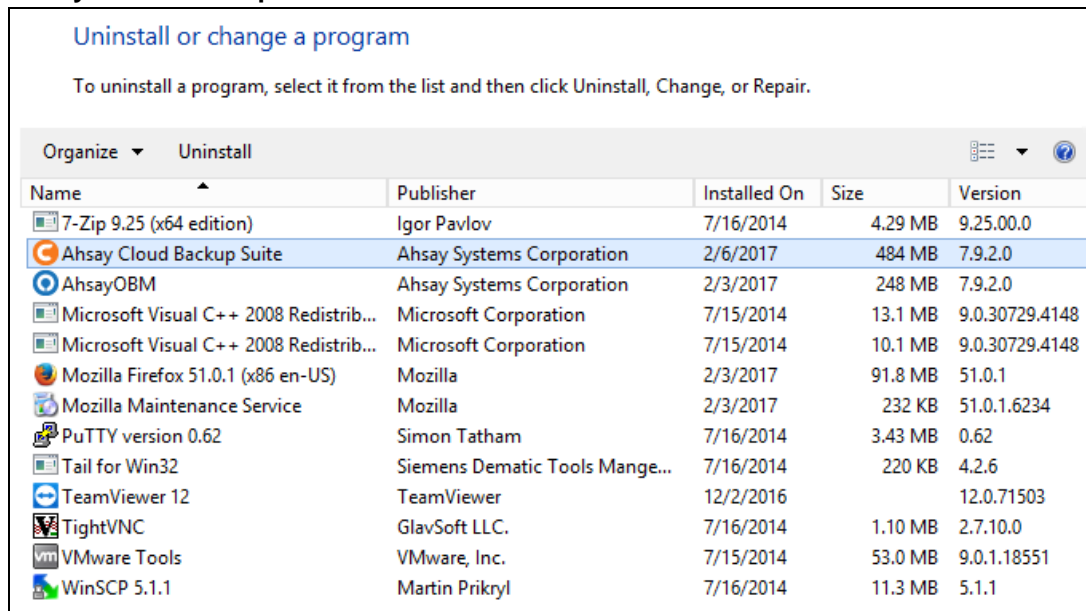


2. The AhsayCBS Uninstall wizard will be shown on the screen, click **Yes** to proceed.

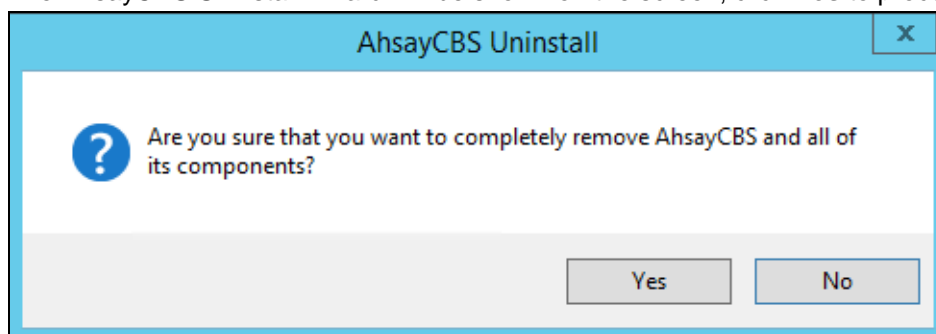

3. If there is a Run Direct restore running at the time of the AhsayCBS uninstallation, the following screen prompts to alert you the NFS service is in use.
- Select **No** if you do not wish to force uninstall the NFS service. AhsayCBS will be uninstalled without affecting the NFS service, where the Run Direct restore will not be interrupted.
  - Select **Yes** to force uninstall the NFS service. Both AhsayCBS and NFS service will be uninstalled from the machine. The VM running Run Direct restore session and the datastore are both unmounted from the VMware server.

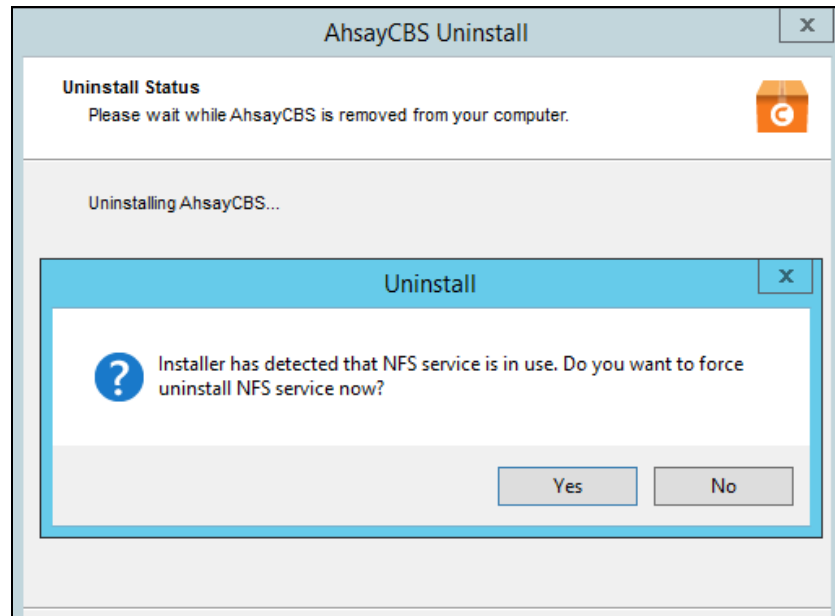

4. The following screens prompt when the uninstallation is completed. Click **OK** to exit the prompts.

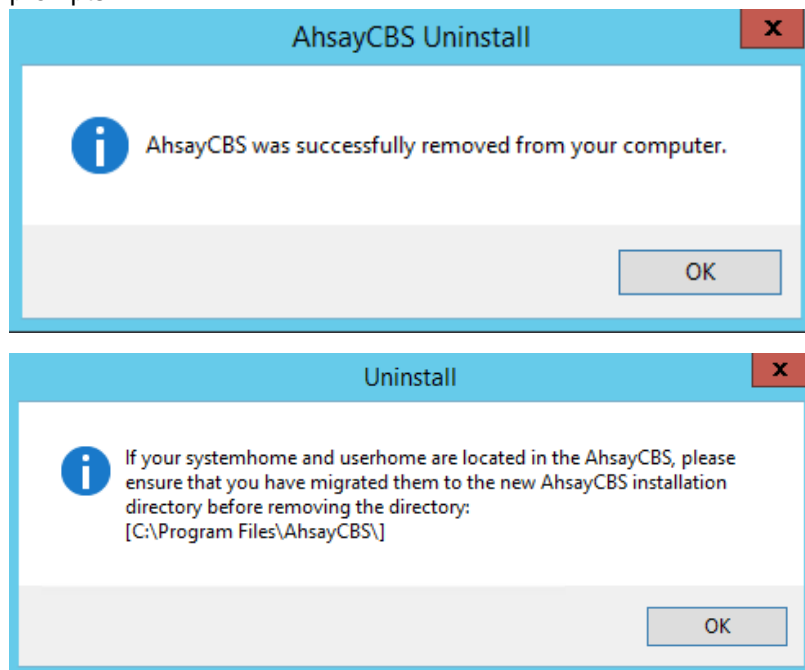

5. The system will automatically open a file folder directing to the installation path, so that the USER\_HOME, SYSTEM\_HOME and POLICY\_HOME can be copied/backed up easily if required.

## Uninstall AhsayCBS on Linux/FreeBSD

To uninstall AhsayCBS from a Linux or FreeBSD system, please follow the steps below.

1. Login as root to the Linux/FreeBSD machine.

2. Go to the `/usr/local/cbs/bin` directory.

```
# cd /usr/local/cbs/bin
```

3. Uninstall AhsayCBS using the `sh` command.

```
# sh uninstall.sh
```

4. After successful uninstallation, AhsayCBS and NFS service will no longer be available because removal of the startup scripts will stop the services from starting at bootup.

```
Log Time: Fri Nov 18 14:08:56 HKT 2016
Verifying current user privilege ...
Current user has enough privilege to "uninstall".
Using CBS_HOME: /usr/local/cbs
Using JAVA_HOME: /usr/local/cbs/java
Try to shutdown [ Ahsay Cloud Backup Suite ]
-----
You may set SYSTEM_DEBUG=0 to disable the debug message
-----
Current User Name      : root
Using SYSTEM_TYPE      : linux
Using SYSTEM_ARCH      : x86_64
-----
Using CBS_HOME          : /usr/local/cbs
Using JAVA_HOME         : /usr/local/cbs/java
Using CATALINA_HOME     : /usr/local/cbs/tomcat
Using JAVA_OPTS         : -Djava.library.path=/usr/local/cbs/lib/LinX64 -
DCATALINA_PID=/var/run/obsr.pid -Dsun.net.inetaddr.ttl=3600 -
Dnetworkaddress.cache.ttl=3600 -Dsun.net.inetaddr.negative.ttl=300 -
Dnetworkaddress.cache.negative.ttl=300 -
Dsun.nio.PageAlignDirectMemory=true -Djava.net.preferIPv4Stack=true -
Djava.util.logging.manager=org.apache.juli.ClassLoaderLogManager -
Djava.util.logging.config.file=conf/logging.properties -
Dtc.work.path=work -Dtc.log.path=logs -
Djavax.servlet.context.tempdir=work
Using CATALINA_OPTS :
Using CATALINA_PID    : /var/run/obsr.pid
-----
Stopping AhsayCBS service
Wait 5 seconds before [ Ahsay Cloud Backup Suite ] is down
Remove [ Ahsay Cloud Backup Suite ] (cbs) from service
Uninstall Service for NIX type OS
Using init script path /etc/init.d
Using run level script path /etc/rc.d
Removing symbolic link from run levels
Removing script file cbs from /etc/init.d
[ Ahsay Cloud Backup Suite ] uninstall service is complete!
Try to shutdown [ NFS Service (Ahsay Systems Corporation) ]
Stopping NFS Service (Ahsay Systems Corporation)
Wait 5 seconds before [ NFS Service (Ahsay Systems Corporation) ] is
down
```

```
Remove [ NFS Service (Ahsay Systems Corporation) ] (cbsnfs) from service
Uninstall Service for NIX type OS
Using init script path /etc/init.d
Using run level script path /etc/rc.d
Removing symbolic link from run levels
Removing script file cbsnfs from /etc/init.d
[ NFS Service (Ahsay Systems Corporation) ] uninstall service is
complete!
It is now safe to remove files from /usr/local/cbs
```

5. Make a backup of your existing \$SYSTEM\_HOME, \$USER\_HOME and \$POLICY\_HOME directories to another computer if necessary.
6. Remove the \$CBS\_HOME directory from the system. Once done, AhsayCBS will now be removed from your system.